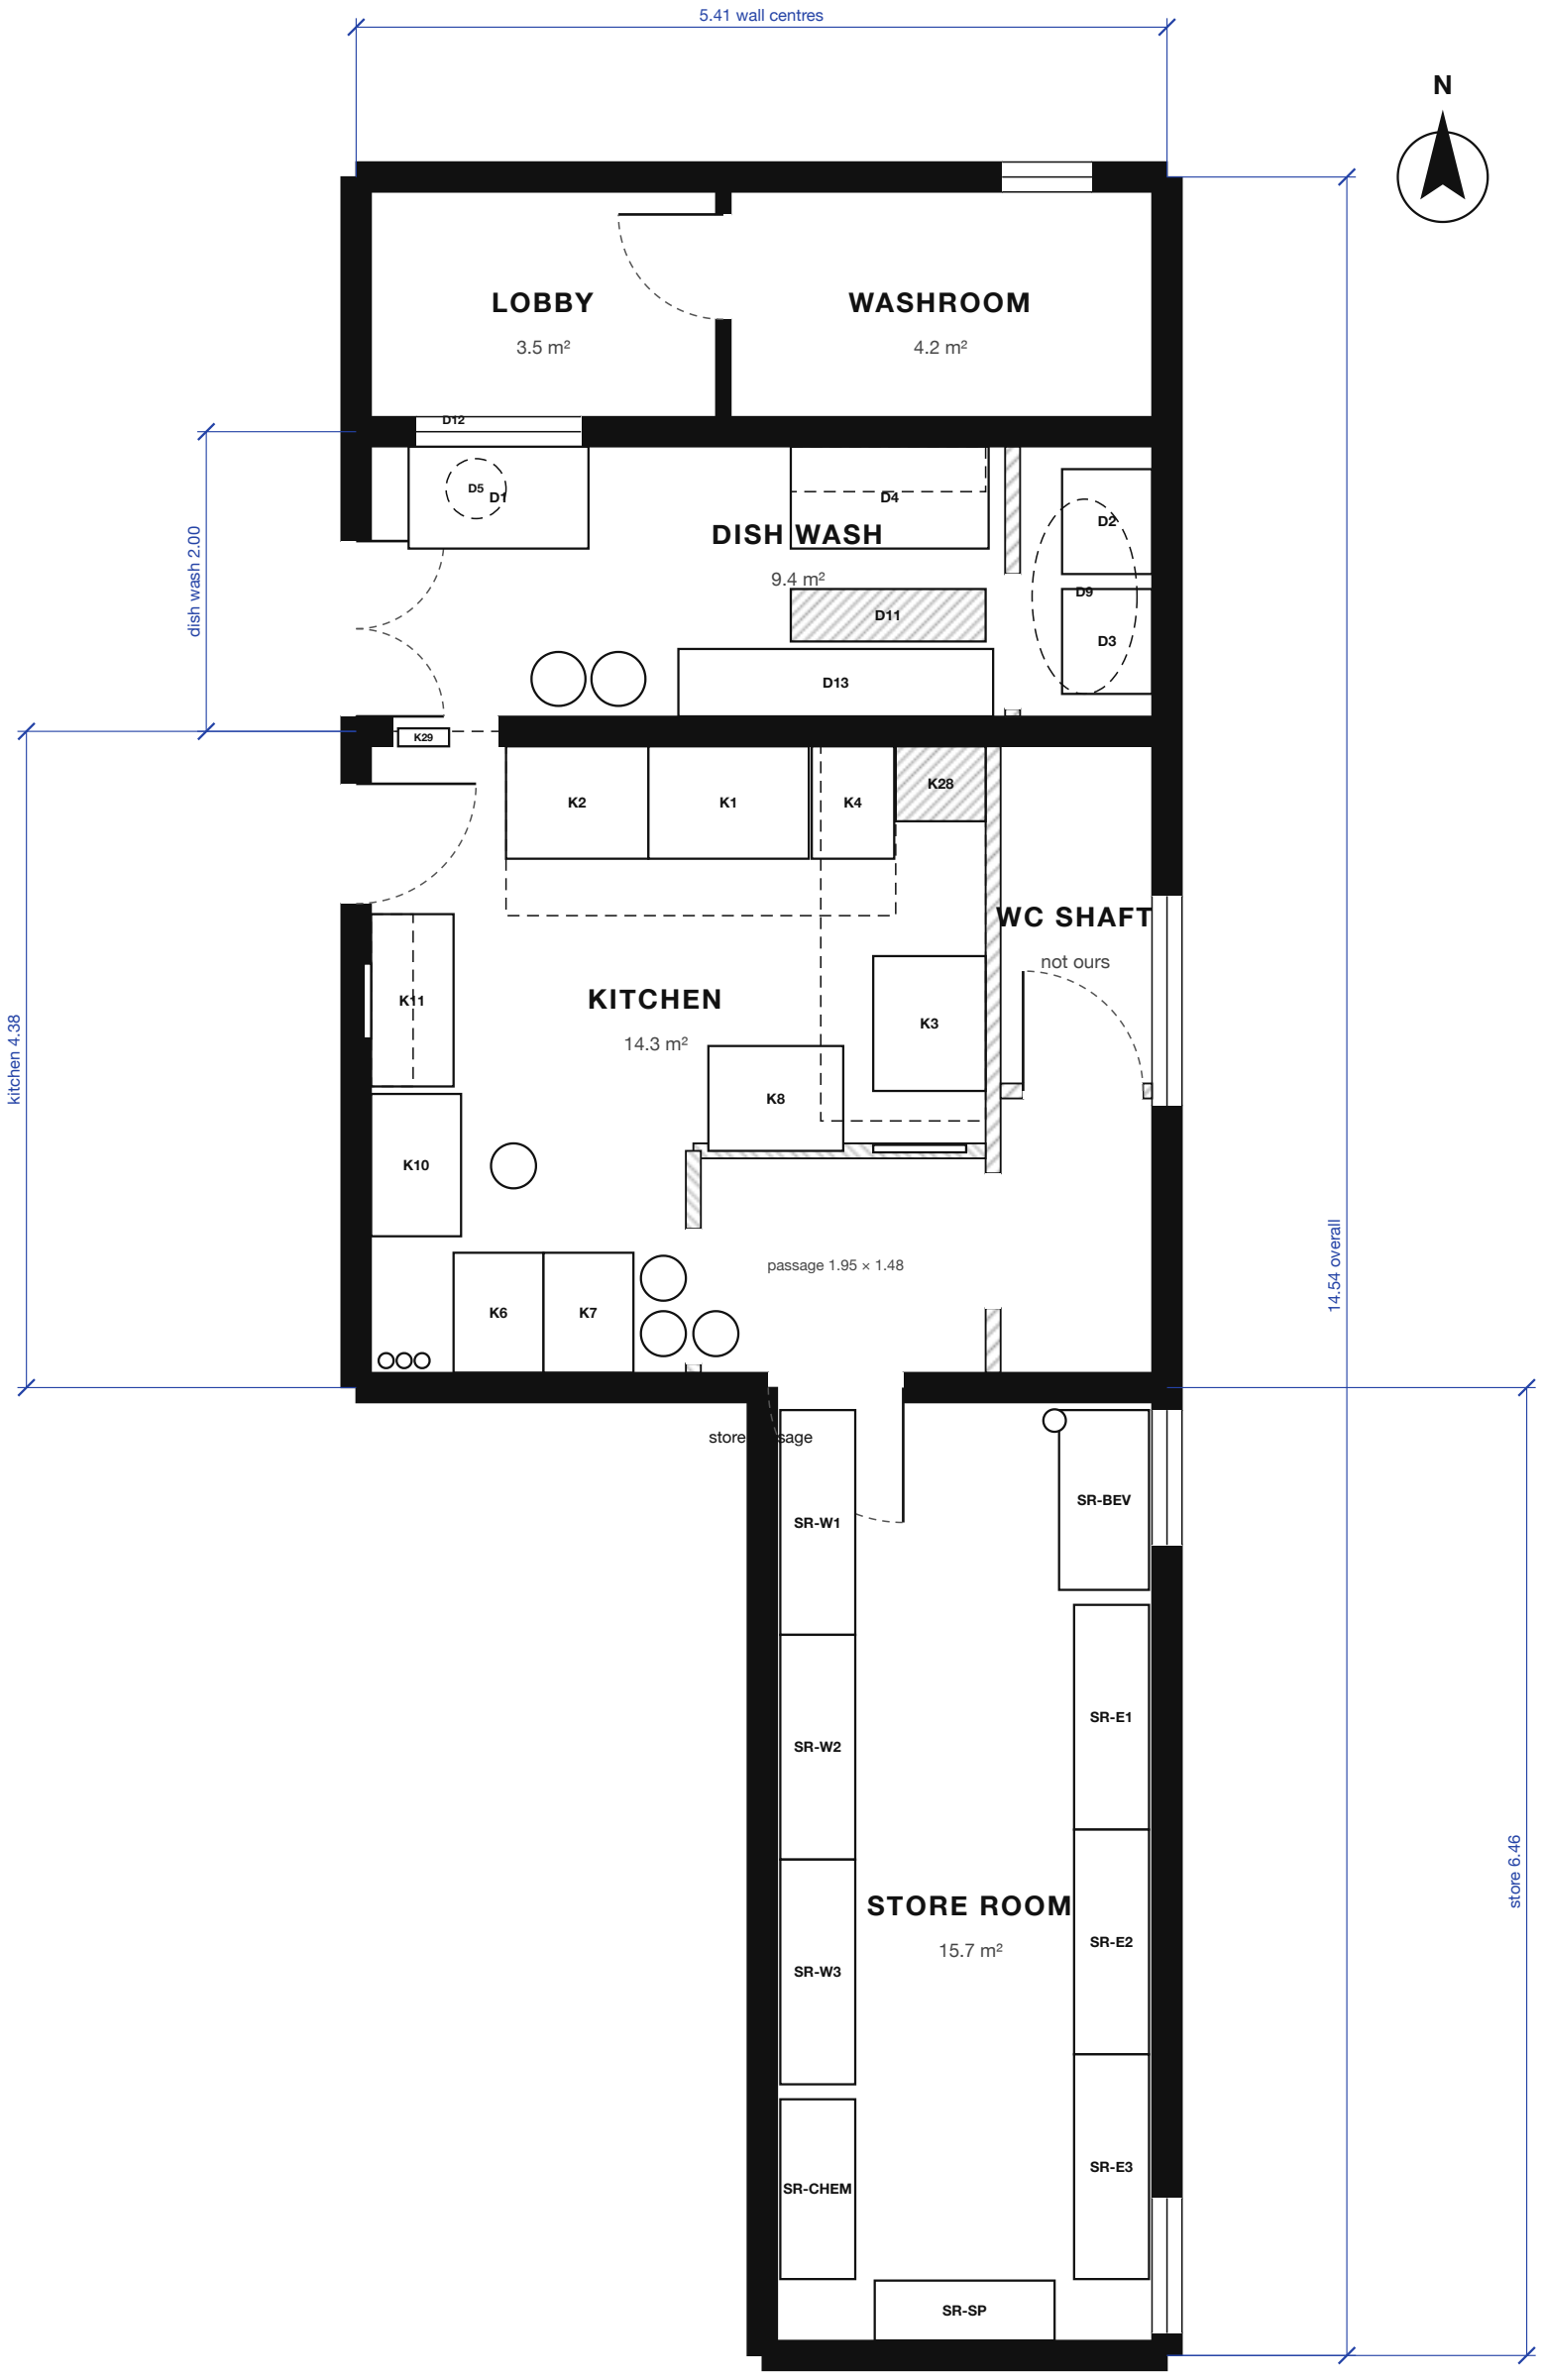


Key

- ■ existing wall, solid
- ▨ timber partition (false wall)
- ▨ existing, hatched
- - - above or hidden

Door swing: dashed arc
Window: three lines in the wall

Notes

1. Walls at wall-centre lines, 0.20 m thick (outer and common), 0.10 m (partitions); dimensions are clear unless marked.
2. Kitchen: 4.10 × 4.18 m clear with the temporary wall at 4.10 m (cannot be removed). The timber false partition (2.2 m, open above) forms the 1.95 m store passage.
3. Assumed, not measured: door and opening positions in the partition, temporary wall and cell wall; washroom door; store windows; kitchen height.


PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
General arrangement
Kitchen block: lobby, washroom, dish wash, kitchen, store room

SCALE AT A3	SHEET	DATE	REVISION
1:50	**A-01**	3 Nov 2026	P1 draft

STATUS	BASIS
PRELIMINARY, for review	Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.

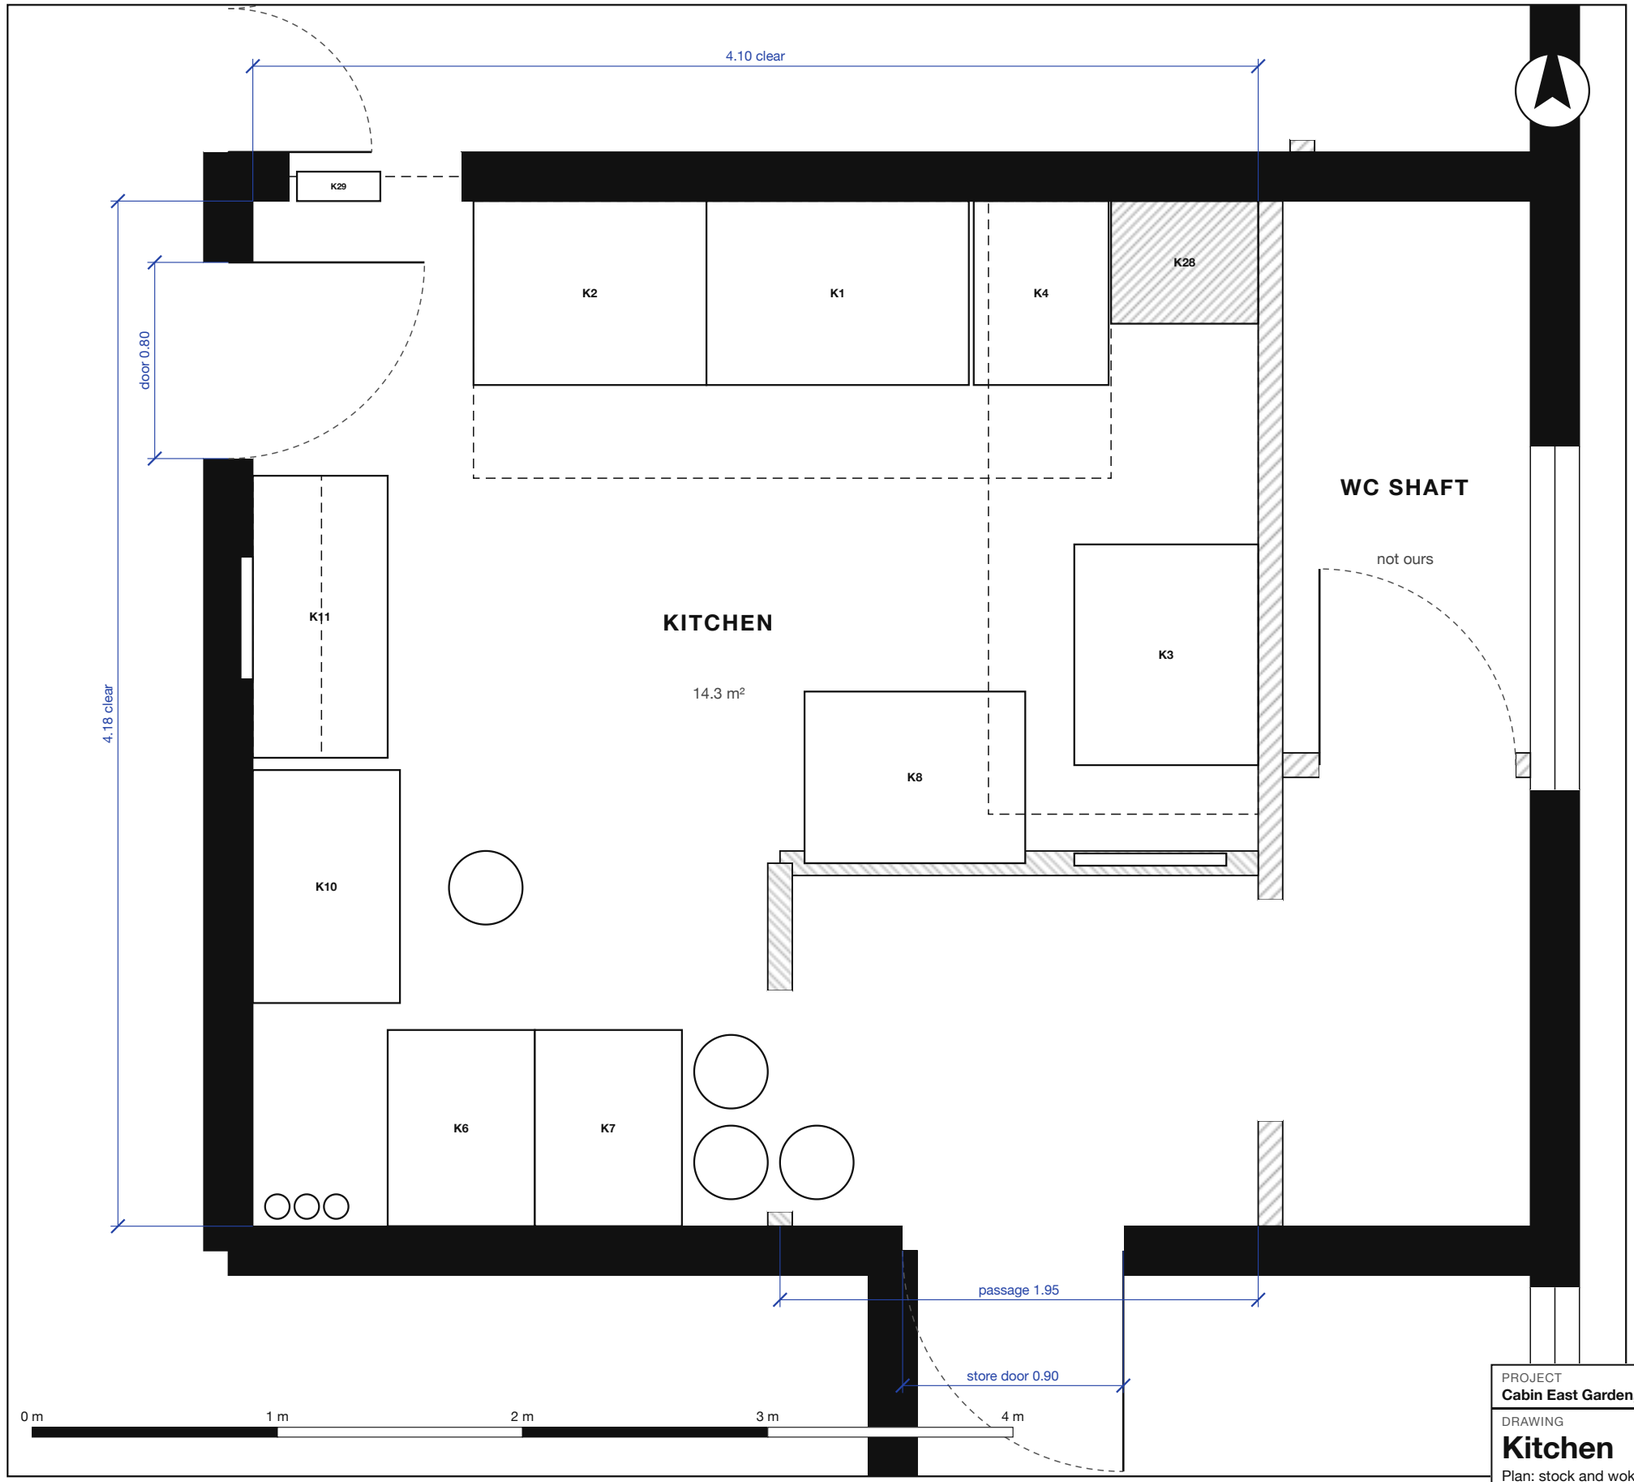

Kitchen schedule

NO.	ITEM	W×D×H M
K1	Wok range, 2 burners	1.07×0.75×0.85
K2	Stock / pot range, 2 burners	0.95×0.75×0.80
K3	Twin-tank fryer, 2 × 15 L	0.90×0.75×0.90
K4	Dim sum steamer, 1 station	0.55×0.75×0.90
K5	Exhaust hood	2.60×1.13×0.50
K6/K7	Dual-zone upright: chiller + freezer	1.20×0.80×1.95
K32	Washroom opening 0.90 (existing)	0.90×0.10×2.05
K8	Under-counter chiller + raw bench	0.90×0.70×0.90
K10	Veg prep bench	0.60×0.95×0.90
K11	Pass table, by the door	0.55×1.15×0.92
K12	Wall shelf, one tier	0.30×1.15×0.04
K14	Rice cooker, 10 L	0.45×0.45×0.45
K26	KDS screen S1, 27 in	0.62×0.05×0.37
K27	KDS screen S2, 21.5 in	0.50×0.05×0.29
K19	Waste bins, red and green ×4	0.35×0.35×0.55
K28	Sink (existing, NE corner) (existing)	0.60×0.50×0.85
K22	U1 slatted shelves, under K10	0.55×0.90×0.80
K29	Gas shut-off + detector	0.30×0.12×0.30
K30	Kitchen door 0.80	0.80×0.05×2.05
K31	False partition (existing) (existing)	1.95×0.10×2.20
K20	Extinguishers and blanket ×3	0.15×0.15×0.50


PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
Kitchen
Plan: stock and wok ranges on the north wall, fryer on the east wall, 0.90 m clear in front of the sink, store passage in the south-east corner

SCALE AT A3	SHEET	DATE	REVISION
1:25	**A-02**	3 Nov 2026	P1 draft

STATUS	BASIS
PRELIMINARY, for review	Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.

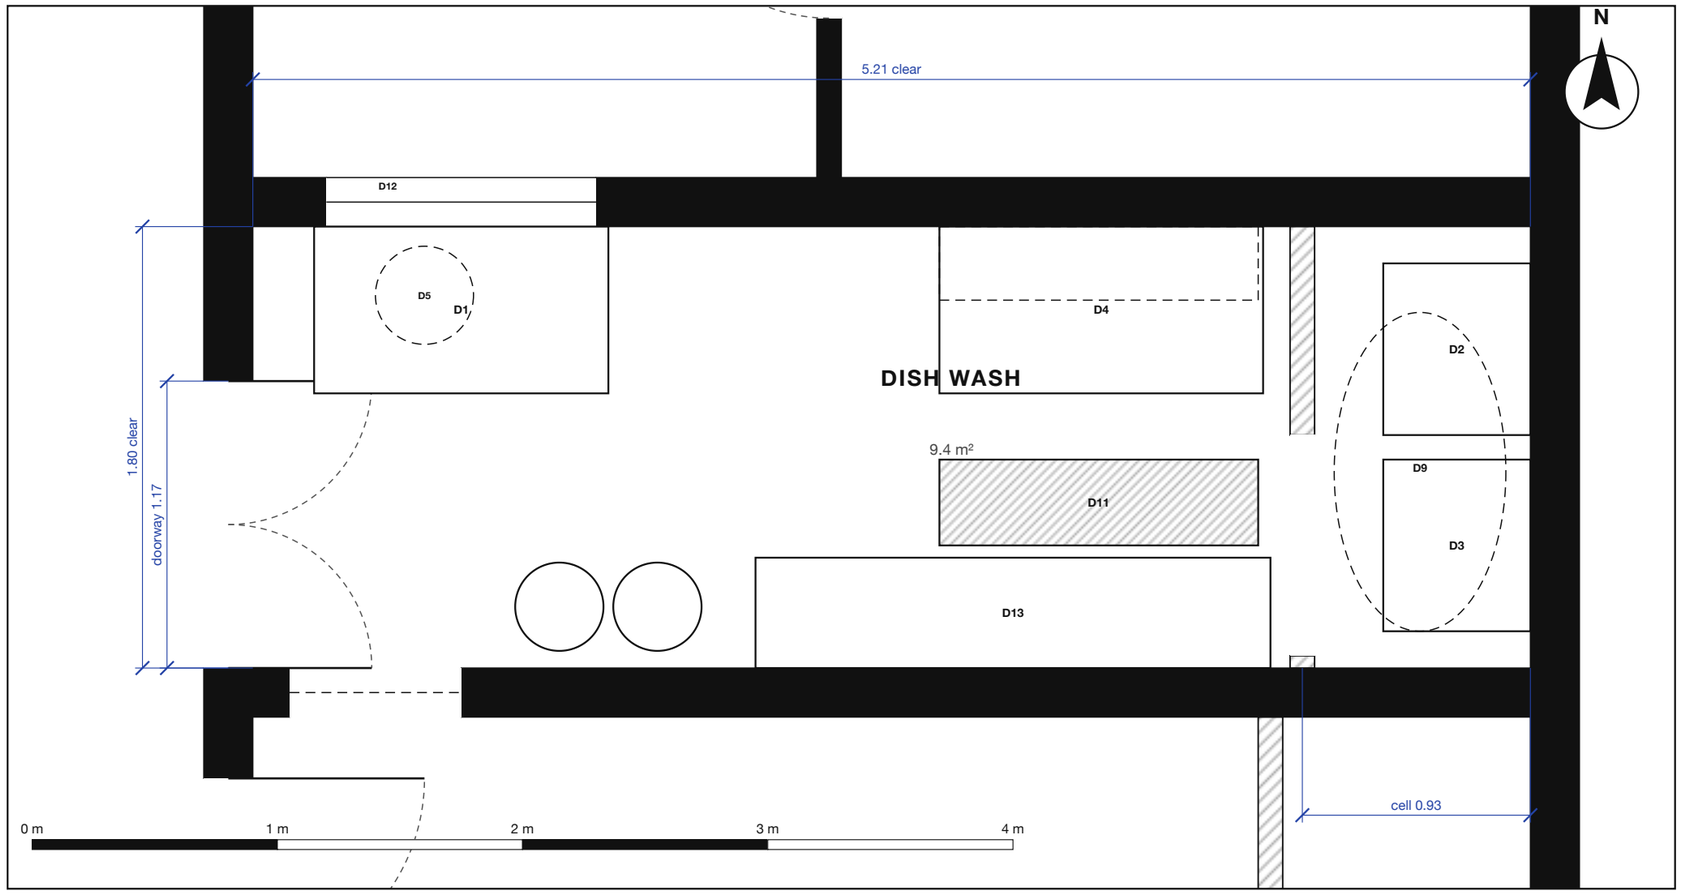

Dish-wash schedule

NO.	ITEM	W×D×H M
D1	Used-plate drop-off table	1.20×0.68×0.85
D2	Wash sink (east cell)	0.60×0.70×0.85
D3	Rinse + sanitise sink (east cell)	0.60×0.70×0.85
D4	Clean table	1.32×0.68×0.85
D4a	Wall shelves, 2 tiers ×2	1.30×0.30×0.04
D5	Water heater, 50 L	0.40×0.40×0.65
D6	Racks ×10	0.50×0.50×0.10
D7	Bus tubs ×2	0.53×0.40×0.20
D8	Waste bins ×2	0.40×0.40×0.60
D9	Water tank, 500 L (existing)	0.70×1.30×0.70
D10	Cell partition (existing)	0.10×1.80×2.50
D13	Crockery racks	2.10×0.45×1.80
D14	Dish-wash door 1.17	1.17×0.05×2.05
D11	Floor drain grating (existing)	1.30×0.35×0.02
D12	Pass hatch with shutter	0.70×0.10×0.70


PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
Dish wash
Plan: drop-off table, clean table, crockery racks, two-sink cell with the 500 L tank above

SCALE AT A3	SHEET	DATE	REVISION
1:25	**A-03**	3 Nov 2026	P1 draft

STATUS	BASIS
PRELIMINARY, for review	Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.

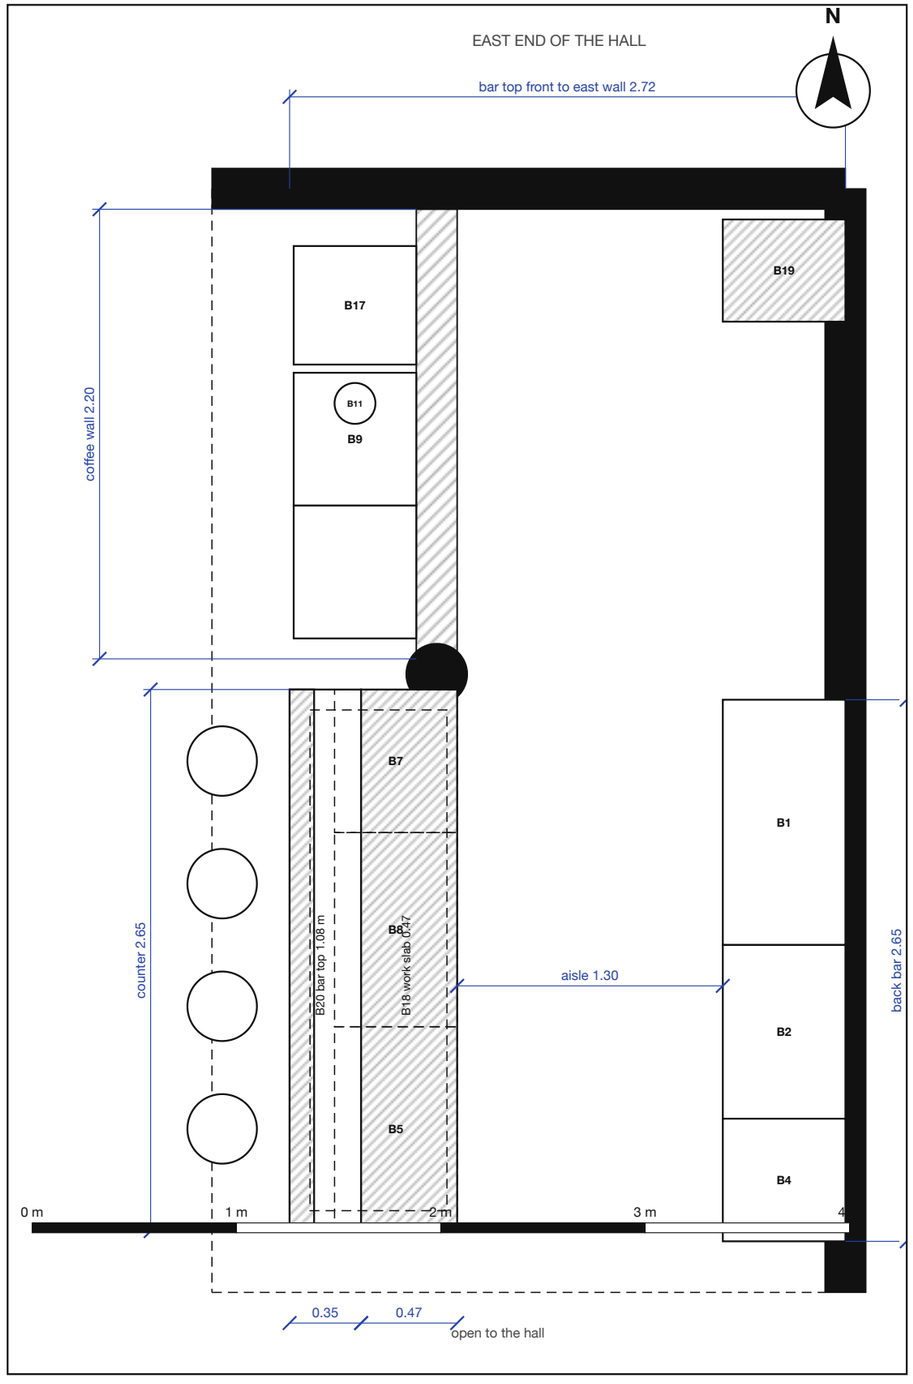

Bar schedule

NO.	ITEM	W×D×H M
B1	Bottle cooler, 2 glass doors	1.20×0.60×0.85
B2	Base cabinet (plain)	0.85×0.60×0.85
B17	POS desk	0.58×0.60×0.92
B17a	Cash drawer, under the desk	0.41×0.42×0.10
B4	Back-bar cabinet	0.60×0.60×0.85
B5	Keg chiller, 3 kegs	1.00×0.60×0.85
B6	Tap font, 3 taps	0.60×0.20×0.45
B7	Sink with ice well	0.70×0.55×0.85
B8	Lockable cabinet	0.95×0.60×0.85
B9	Under-counter fridge	0.60×0.60×0.85
B11	Filter-coffee brewer	0.45×0.40×0.65
B12	Hot-water urn	0.30×0.30×0.55
B13	Water filter	0.20×0.15×0.45
B14	Bar bin	0.30×0.30×0.50
B16	KDS screen S3, 15.6 in	0.38×0.03×0.23
B15	Hanging glass rack (existing)	2.60×0.67×0.28
B20	Bar top, 1.08 m high	2.65×0.35×1.08
B21	Blue pillar (existing) (existing)	0.30×0.30×3.00
B18	Wooden slab, 0.47 wide (existing) (existing)	2.65×0.47×0.92
B19	Sink in the aisle (existing) (existing)	0.60×0.50×0.85

Note Ceiling above the bar top is 1.10 m (soffit 2.18 m): the hanging glass rack is at 1.70 to 1.88 m. Stools seat at 0.735 m.


PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
Bar
Plan: counter with raised bar top over the work slab, coffee wall in line with the counter, blue pillar, coffee station in front of the wall

SCALE AT A3	SHEET	DATE	REVISION
1:30	**A-04**	3 Nov 2026	P1 draft

STATUS	BASIS
PRELIMINARY, for review	Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.

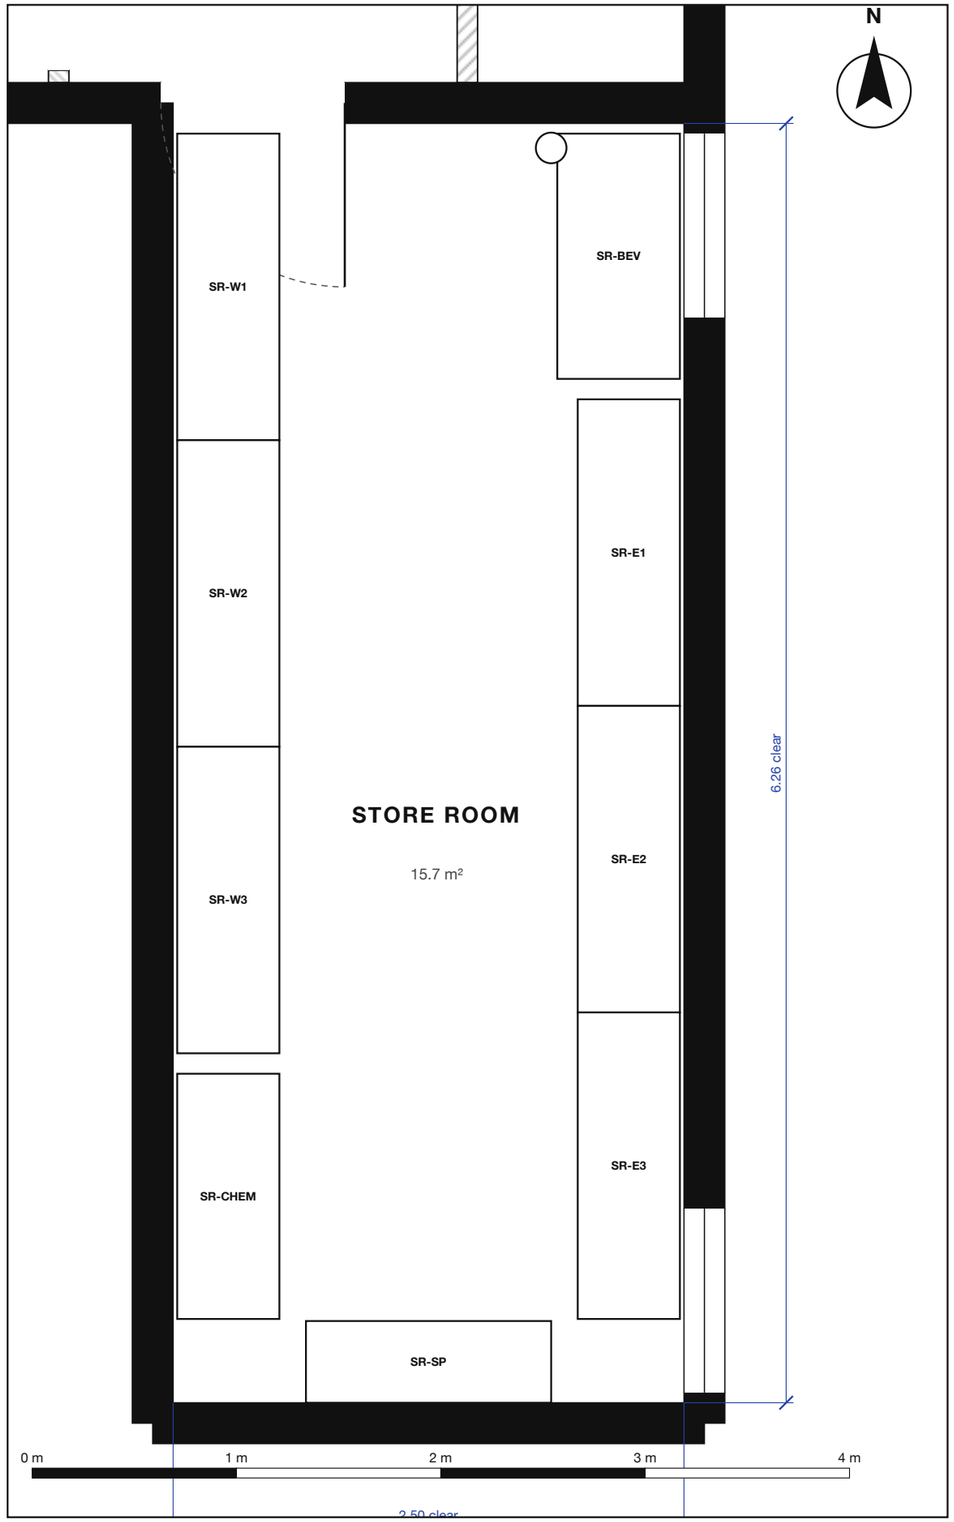

Store-room schedule

NO.	ITEM	W×D×H M
SR-W1	Rack: oils, sauces	1.50×0.50×1.80
SR-W2	Rack: rice, noodles, flour	1.50×0.50×1.80
SR-W3	Rack: tins, jars, spices	1.50×0.50×1.80
SR-CHEM	Chemical cupboard, locked	1.20×0.50×1.80
SR-BEV	Beverage pallet stack	1.20×0.60×1.20
SR-E1	Rack: veg crates	1.50×0.50×1.80
SR-E2	Rack: bar dry goods	1.50×0.50×1.80
SR-E3	Rack: paper, packaging	1.50×0.50×1.80
SR-SP	Spirits cage, locked	1.20×0.40×1.80
SR-FE	Extinguisher	0.15×0.15×0.50


PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
Store room
Plan: racks both sides of a 1.46 m aisle, two corner windows on the east wall

SCALE AT A3	SHEET	DATE	REVISION
1:30	**A-05**	3 Nov 2026	P1 draft

STATUS	BASIS
PRELIMINARY, for review	Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.

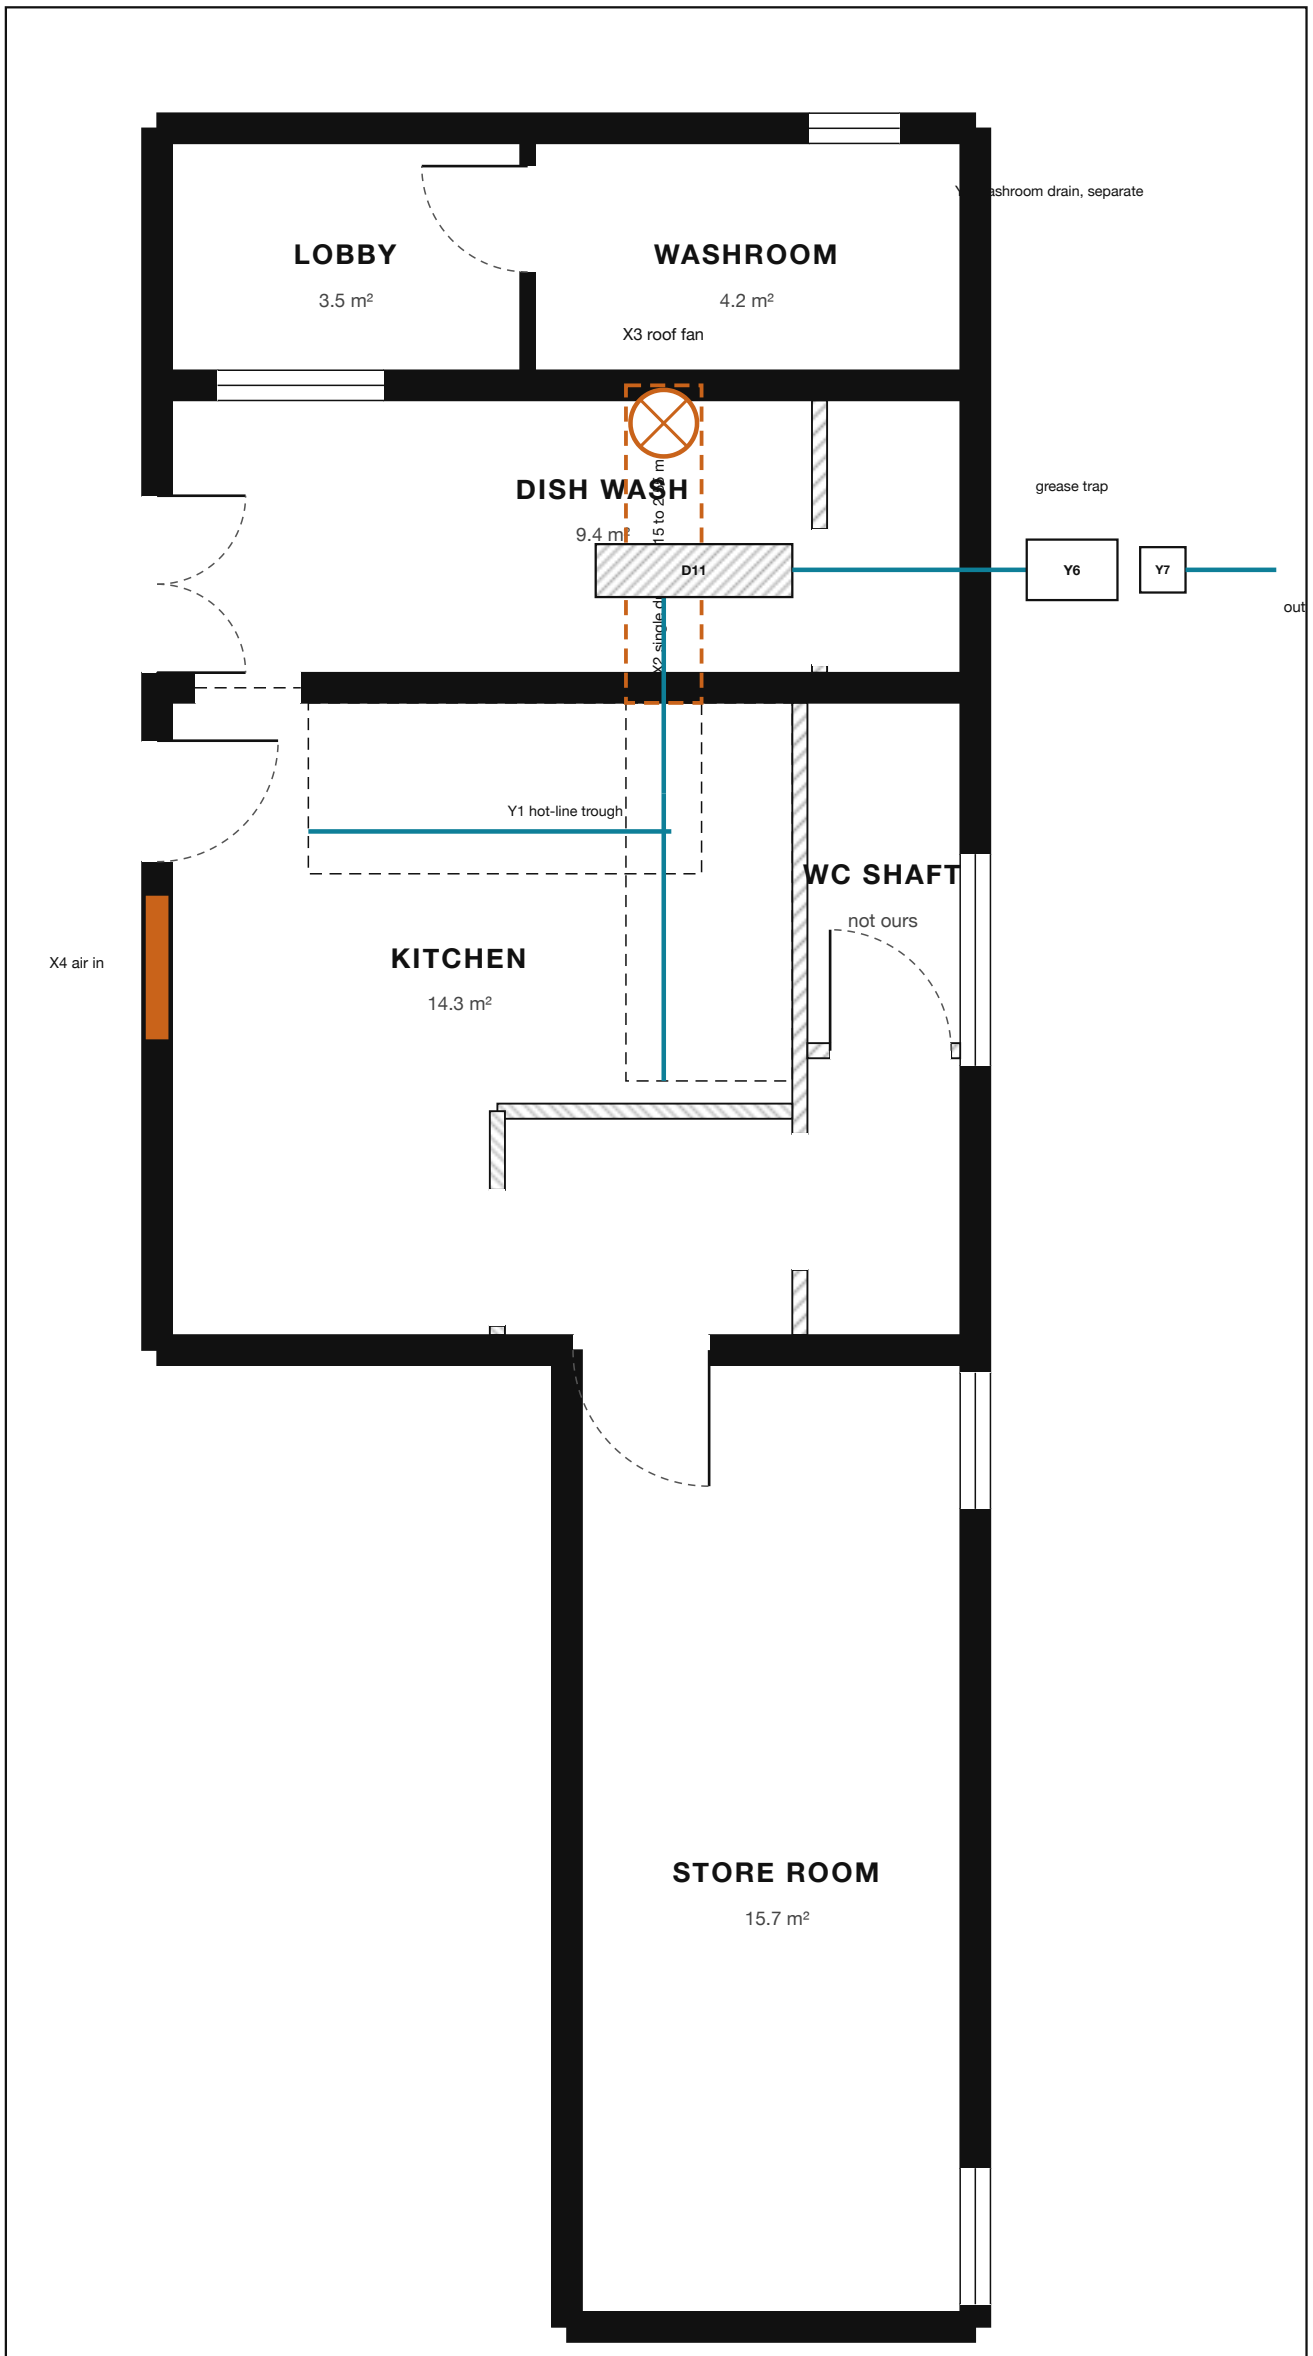

Exhaust and drainage schedule

NO.	ITEM	W×D×H M
X1	Hood with grease filters	2.60×1.13×0.50
X2	Duct across the dish wash	0.50×2.00×0.40
X3	Roof fan and cowl	0.90×0.90×0.88
X4	Make-up air louvre	0.90×0.10×0.40
X5	Dish-wash louvre (existing) (existing)	1.10×0.10×0.90
X6	Store windows ×2 + door grille ×2	0.90×0.10×0.70
X7	Washroom extractor (existing) (existing)	0.30×0.10×0.25
Y1	Hot-line trough	4.30×0.10×0.10
Y2	Kitchen floor falls	4.18×0.15×0.00
Y3	Kitchen outlet pipes	0.10×0.10×0.10
Y4	Dish-wash floor drain (existing)	1.30×0.35×0.02
Y5	Drain line to the trap	0.10×0.10×0.10
Y6	Grease trap, outside	0.60×0.40×0.40
Y7	Inspection chamber + outfall	0.45×0.45×0.50
Y8	Washroom drain (separate)	0.10×0.10×0.10
Y9	Bar sink gully	0.15×0.15×0.05
Y10	Store room: none	0.10×0.10×0.00

Legend

— exhaust and make-up air
— drainage


PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
Exhaust and drainage
Block plan: hood duct across the dish wash to the roof fan; trough, grease trap, inspection chamber and outfall

SCALE AT A3	SHEET	DATE	REVISION
1:50	**A-06**	3 Nov 2026	P1 draft

STATUS	BASIS
PRELIMINARY, for review	Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.

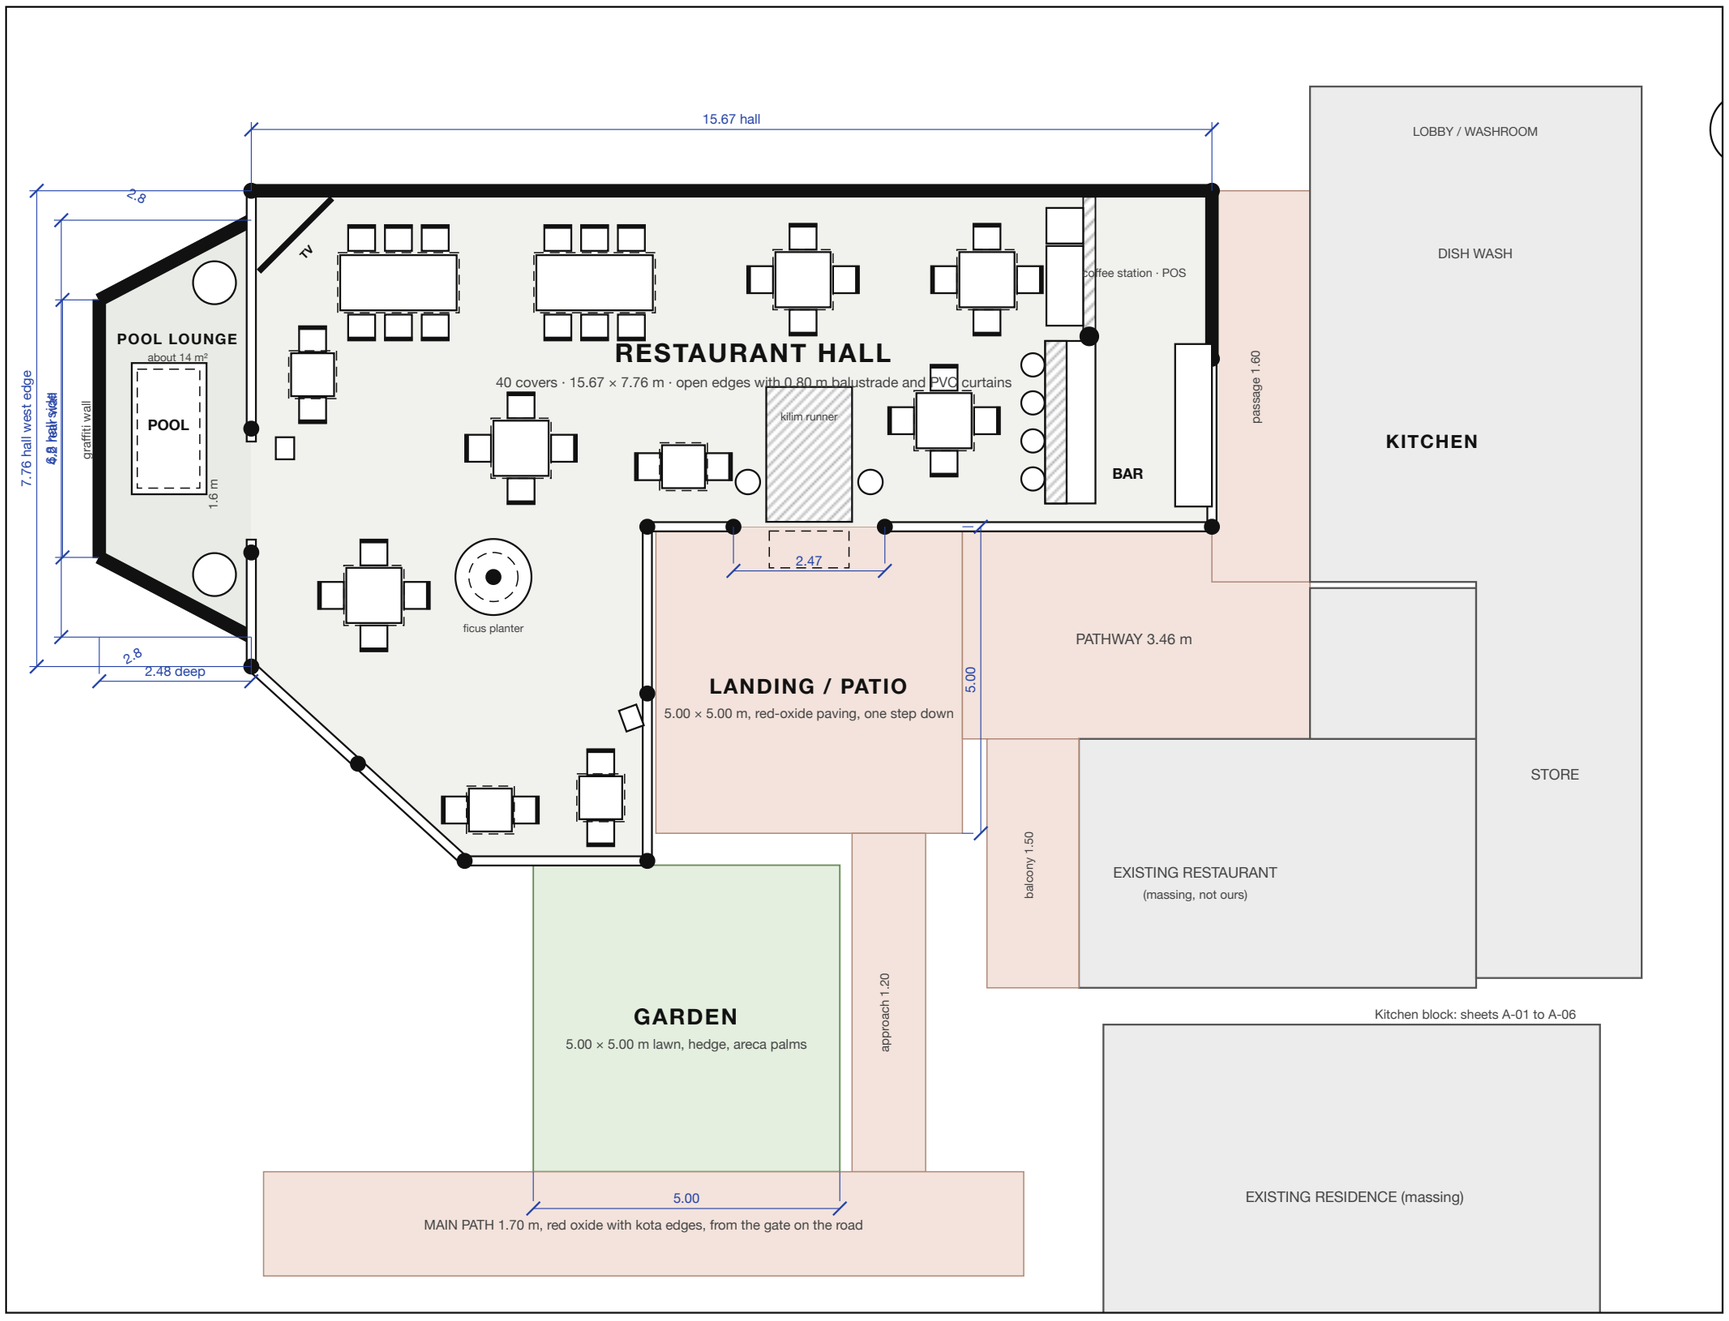

Notes

1. Pool lounge: hall side 6.8 m, rear wall 4.2 m, two side walls 2.8 m, so about 2.48 m deep; entrance 1.6 m. Taken from the client annotation; confirm on site.
2. The hall west edge is 7.76 m; the 80 cm balustrade and PVC curtains stay either side of the entrance.
3. Garden, landing, paths and the hall layout are as modelled in the 3D model; existing buildings are massing only.
4. Sheets A-01 to A-06 cover the kitchen block, bar and services.


PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
Restaurant hall, pool lounge, garden and patio
Site plan: hall with tables, the new pool lounge on the west edge, the garden and landing, paths and the kitchen block

SCALE AT A3	SHEET	DATE	REVISION
1:100	**A-07**	3 Nov 2026	P1 draft

STATUS	BASIS
PRELIMINARY, for review	Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.

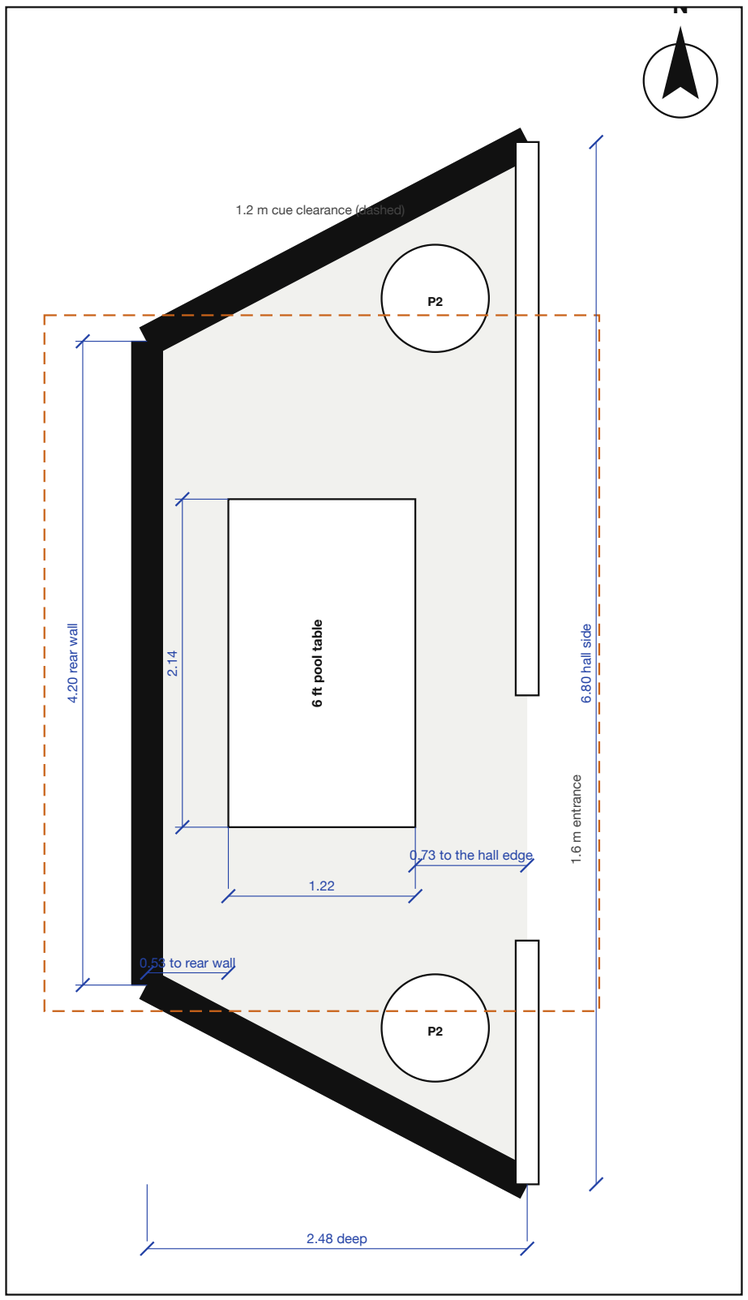

Pool lounge schedule

NO.	ITEM	W×D×H M
P1	Pool table, 6 ft (2.14 × 1.22 m outside), slate bed, rails at 0.82 m	2.14×1.22×0.82
P2	Standing (high) table, 0.70 m round, 1.05 m high ×2	0.70×0.70×1.05
P3	Billiard lamp over P1, hung at 1.70 m	1.40×0.44×0.08
P4	Cue rack on the graffiti wall, 4 cues	0.80×0.05×1.05
P5	Graffiti wall, 4.0 × 2.15 m painted panel on the rear wall	4.00×0.02×2.15

Fit check A 6 ft table needs about 1.2 m of cue space on every side (a 57 in cue), so a room of 3.4 × 4.5 m. The lounge is 2.48 m deep: 0.53 m behind the table and 0.73 m in front. Use short cues (48 in or less, about 0.9 m of space) or choose a 5 ft table; a 7 ft table does not fit. Dimensions come from the annotated screenshot and should be checked on site.

PROJECT
Cabin East Garden, Goa · kitchen block, dish wash, bar, store room

DRAWING
Pool lounge
Plan: 6 ft pool table and two standing tables, with the 1.2 m cue clearance that the room cannot give

SCALE AT A3	SHEET	DATE	REVISION
1:40	**A-08**	3 Nov 2026	P1 draft

STATUS
PRELIMINARY, for review

BASIS
Client site sketches and photos; clear dimensions in metres

Not for construction. Sizes marked as assumed are not measured: confirm on site before ordering or building.