REQUEST FOR QUOTATION · SUPPLY, INSTALLATION AND COMMISSIONING

Lighting sheet for vendor quotation

CABIN EAST GARDEN · DIM SUM AND CRAFT BEER PUB · OPEN HALL, BAR, POOL LOUNGE, GARDEN AND BACK OF HOUSE · CAVELOSSIM, GOA

THE PROJECT

An open-sided 40-cover restaurant hall under a roof (about 15.67 × 7.76 m), with a bar at its east end, a pool lounge on the west side, a landing, an approach path and a small garden, and a kitchen block (kitchen, dish wash, store room, washroom) beside it. The mood is a warm, amber, bottle-green Goan garden room at night: low colour temperature, dimmable, no bare bright bulbs at guests' eye height.

WHAT WE ASK YOU TO QUOTE

Supply, installation, wiring from the lighting distribution board, controls, testing and commissioning of every fitting in the fixture schedule (section 3), as drawn on the lighting plan (section 4) and controlled as described in section 5. Please price each line on the price form (section 8) and answer the questions in section 9.

Kitchen block included. The kitchen, store passage, dish wash (and its sink cell), store room, washroom, lobby and the staff doors on the pathway are all in scope: L26 to L35.

In numbers. 36 fitting types · about 144 fittings plus 79 festoon bulbs, 19 bar-string bulbs and about 590 + 1,100 micro-LEDs · six dimmed or timed control groups · connected load about 1.12 kW (about 5.8 A at 230 V including drivers).

HOW TO QUOTE

1. Price every line of section 8; mark any line you cannot supply and offer an alternative with a photo and data sheet.
2. State make and model, lumen output, colour temperature, CRI, IP rating, driver, dimming method and warranty for every type.
3. Quote supply and installation separately, with GST shown separately.
4. Quote the options (L16, L25, L35) separately so they can be accepted or dropped.
5. Give a lead time per line and a programme.
6. Send samples of L01, L09, L11 and L13 before any order.

QUOTATION DETAILS

ITEM	DETAIL
Client	Tanvi · Cabin East Garden
Site address	Cavelossim, Goa (full address and Google Maps pin to be added before sending)
Client contact for this RFQ	_____
Quotation due by	_____
Site visit	Please visit before quoting: _____
Target start / finish on site	_____
Opening date	_____
Currency and tax	INR; GST shown separately
Quotation validity	At least 60 days

ENCLOSED

1	Cover and how to quote
2	Site conditions, heights and lighting targets
3	Fixture schedule L01 to L35, with reference pictures
4	Lighting plan, 1:100 (A3)
5	Control groups, dimmer presets, circuits and connected load
6	Fixing, wiring and installation notes
7	Inclusions, exclusions, testing, handover and commercial terms
8	Price form (bill of quantities)
9	Site information, open points and questions for the vendor

Status. Draft for quotation. Quantities and positions are taken from the 3D model of the restaurant (garden.html) as at 4 November 2026 and will be firmed up on site. Items marked `TO CONFIRM` or "assumed" are not measured. Reference pictures are illustrative renders, not products.

2 · Site conditions, heights and lighting targets

AREA	CEILING AND HEIGHTS	CONDITIONS
Hall (restaurant)	Flat white ceiling with white dropped beams and coffers (felt panels set in the coffers over the dining room). Soffit 2.18 m at the main (north) wall, rising to about 2.80 m at the open entrance edge (2.18 m measured; 2.80 m estimated). Tile 0.90 m, wall 1.28 m above it.	Open on the south, east, west and angled sides behind PVC roll-down curtains; blown rain and humidity reach the fittings.
Bar (east end of the hall)	Same ceiling; only 1.10 m above the 1.08 m bar top (soffit 2.18 m). A reclaimed timber beam hangs at 1.93 m and a glass rack at 1.70 m.	Behind the counter: brick coffee wall, back bar, onyx panel.
Pool lounge (west)	Flat roof at 2.90 m; painted walls with a graffiti wall at the rear; pool table 0.82 m.	About 14 m²; open to the hall by a 1.6 m entrance.
Open edges and pillars	14 round blue pillars (about 0.24 m across) on white pedestals; 0.80 m balustrade; ring beam at soffit height.	PVC curtains roll up and down: nothing may hang where they roll.
Approach path, gate, garden	Open air. Path 1.20 m wide with three existing black lamp posts, an overhead line for lanterns and orbs, an arched road gate with two lanterns.	Rain, salt air and sun: IP65 and marine-grade finishes.
Kitchen	Sloping white ceiling about 2.6 to 3.0 m with a timber beam; steam and grease; hood over the cooking line.	Hot and humid; sealed fittings; no dimming.
Dish wash, store room, washroom	Flat ceilings about 3.0 m; dish wash is wet; store room has racks 1.8 m tall along both sides of a 1.46 m aisle.	Washroom about 2.96 × 1.70 m, orange doodle walls, blue tile.

ENVIRONMENT

- Coastal Goa: salt air, high humidity most of the year, heavy monsoon (June to September), sun, ants and geckos. Specify marine-grade or powder-coated finishes, stainless fixings, sealed joints and drip loops.
- Supply: 230 V, 50 Hz, single phase (to be confirmed with the electrician; see section 9).
- The hall has three open sides; outdoor-rated cable and IP44 or better for everything in the hall edge zone.

LIGHT QUALITY

- Dining lights: 2200 K, CRI 90 or better, all from one brand and batch (spares from the same batch).
- Walls and art: 2700 K, CRI 90 or better.
- Kitchen, dish wash and store room: 4000 K, CRI 80 or better, 500 lux on the kitchen work surfaces, not dimmed.
- Flicker-free dimming down to about 5%: no visible steps or buzzing.
- No bare bulbs of more than 4 W at guests' eye height; shielded or diffused.

ILLUMINANCE TARGETS (MAINTAINED)

AREA	LUX
Tables at dinner	50 to 80
Bar counter	about 150
Gallery wall (paintings)	100 to 200 on the art
Pool table cloth	about 300, even
Kitchen work surfaces	500
Dish wash	300 to 500
Washroom	about 200
Store room aisle	150 to 200
Approach path and steps	10 to 20

DIMMER PRESETS

Setting in % for each group, matching the model's Lighting presets (Lunch, Sunset, Evening, Late). The vendor programmes these and shows them at commissioning.

GROUP	LUNCH	SUNSET	DINNER	LATE
A table orbs	0 to 40*	60	80	40
B wall lights	40	70	80	60
C open edges	off	50 to 60	70 to 80	30 to 50
D bar	40 to 50	70	80	80
E outside	off	on	on	on
F pool lounge	30	60	80	60

* Off on bright days, 30 to 40 if overcast.

3 · Fixture schedule L01 to L35 (1 of 5)

CODE	REF.	FITTING AND AREA	QTY	LOCATION AND FIXING	MOUNTING HEIGHT	SOURCE, POWER, COLOUR, OUTPUT, BEAM	DIMMING, IP RATING, FINISH	GRP	SUPPLIED BY	NOTES
DINING ROOM										
L01		**Wicker orb pendant over a table** Hall	22 nos	A pair at staggered heights over each four-top and each half of a six-top; one over each two-top. Fixed to the white ceiling beams or coffer soffit on a cord with a ceiling rose.	Orb centres at soffit minus 0.62 m and minus 0.38 m (about 1.7 to 2.2 m above the floor; 0.9 to 1.4 m above the table top at 0.78 m)	E27 LED filament globe (G95 or ST64), dimmable **4 W each · 2200 K · about 300 lm** Beam: Omni	Dimmable, trailing edge IP20 inside the orb; ceiling rose IP44 Hand-woven wicker orb, natural; ivy trails over the top (supplied with the decor)	A	Lighting vendor: lamp holder, cord, rose, bulb and fitting. Orb shells and ivy by the decor supplier (confirm) Spares: 3	Cord length is cut on site to the heights given. Wicker is combustible: keep the bulb at least 5 cm from the weave and use LED only.
L02		**Wicker orb, ambient** Hall	4 nos	Over the bar end, the entrance, the west wing and the garden-rail two-tops.	As L01	E27 LED filament globe, dimmable **4 W each · 2200 K · about 300 lm** Beam: Omni	Dimmable IP20 inside; rose IP44 As L01	A	As L01 Spares: 1	
L03		**Table candle (flameless)** Hall	15 nos	Loose on every table: one per four-top and two-top, three per six-top. No wiring.	On the table	Rechargeable LED pillar candle in a glass hurricane, with a charging tray **0.3 W each · Flame-warm · about 10 lm** Beam: Omni	Remote on/off IP20 Clear glass	–	Supply only, no installation; confirm whether the lighting vendor supplies them Spares: 2	Charging tray and trolley to be quoted with them.
L04		**Ceiling-fan light kit** Hall	4 nos	Small LED disc under each of the four hugger fans; work light for set-up and cleaning.	Under the fan	Built-in LED disc **10 W each · 3000 K · about 800 lm** Beam: Wide	Not dimmed (wall switch) IP20 White	–	Part of the fan supply: lighting vendor wires the switch only Spares: 0	Fans are outside this scope.
L05		**Centrepiece tree: micro-LED strings** Hall (west wing)	6 strings	Wound through the faux ficus tree round the pillar at about x 3.95 m, y 6.3 m; about 590 micro LEDs used from 6 strings of 100.	Tree canopy up to the ceiling (about 2.4 m)	Low-voltage micro-LED copper-wire string, 100 LEDs, with plug-in driver **5 W each · Warm white (2200 to 2700 K) · lumens: vendor to state** Beam: Omni	Timer or switched (group E) IP44 minimum Copper wire, hidden in foliage	E	Lighting vendor Spares: 1	Driver hidden in the planter; keep leads away from the pebble bed.
L05a		**Centrepiece tree: ceiling disc** Hall (west wing)	1 no.	A glowing disc in the ceiling directly over the tree.	Flush with the soffit (about 2.45 m)	Surface or recessed LED disc, diffused **10 W each · 2200 K · about 500 lm** Beam: Wide	Dimmable IP44 White opal	E	Lighting vendor Spares: 0	Disc diameter to be proposed (0.6 to 0.8 m).
WALLS AND ART										
L06		**Gallery wall spot** Hall, north wall	5 nos	On the white beam about 1.3 m out from the north wall, one per bay, aimed at the gallery wall. Adjustable.	About 2.1 to 2.3 m above the floor (underside of the beam)	GU10 LED spot, 5 W **5 W each · 2700 K · about 400 lm** Beam: 36° (narrow beam to wash the wall)	Dimmable IP20 Black or white to suit the beam	B	Lighting vendor Spares: 1	Aim to give even light on the frames without glare in guests' eyes.

Wattages and lumens are typical LED values for planning; the vendor states the real figures for the fittings offered. Reference pictures are illustrative renders. Group letters are explained in section 5. Spares are in addition to the quantities, about 10% for dining bulbs.

3 · Fixture schedule L01 to L35 (2 of 5)

CODE	REF.	FITTING AND AREA	QTY	LOCATION AND FIXING	MOUNTING HEIGHT	SOURCE, POWER, COLOUR, OUTPUT, BEAM	DIMMING, IP RATING, FINISH	GRP	SUPPLIED BY	NOTES
L07		**Bell-shaded brass wall lamp** Hall, north wall	4 nos	At the ends of the gallery bays on the north wall.	About 1.4 m above the floor (centre)	E14 LED candle bulb, dimmable **4 W each · 2200 K · about 250 lm** Beam: Omni	Dimmable IP20 Brass with a cream fabric shade	B	Lighting vendor Spares: 1	Concealed cable to the wall box.
L08		**Picture light** Hall	2 nos	Over the oil painting (north wall) and the coffee-wall mural (by the bar).	Above the frame, about 2.0 m	Built-in LED bar light, 300 to 600 mm **6 W each · 2700 K · about 400 lm** Beam: Asymmetric wall wash	Dimmable IP20 Brass	B	Lighting vendor Spares: 0	Length to suit each frame; mural frame width about 0.85 m.
OPEN EDGES (BOUGAINVILLEA SIDE)										
L09		**Bronze cage lantern on a pillar** Hall, open edges	14 nos	On a curved arm on each of the 14 round blue pillars (about 0.24 m across): south front, entrance, west wing, angled corner and west side. The lantern stands 0.24 m out from the pillar.	Lantern base at soffit minus 0.52 m: about 1.7 m (north) to 2.3 m (entrance side) above the floor; body 0.30 m tall	E27 LED filament lamp **4 W each · 2200 K · about 300 lm** Beam: Omni (cage)	Dimmable IP44 minimum (exposed to blown rain) Dark bronze, powder-coated or marine-grade	C	Lighting vendor Spares: 2	Cable concealed down the pillar or in the balustrade plinth. Pillars are painted: do not chase into them without approval.
L10		**Ground uplight on the bougainvillea** Hall, open edges	14 nos	At the foot of each pillar, washing the blue column and the bougainvillea trained along the eaves.	Ground or pedestal level (0 to 0.1 m)	Outdoor LED spot, 5 W, with a stake or a surface bracket **5 W each · 2700 K · about 350 lm** Beam: 30° to 40°	On/off with the timer (group E) IP65 Black or bronze, marine grade	E	Lighting vendor Spares: 2	Cable run to be hidden; plan for water: raise the junction above the floor.
L11		**Festoon inside the PVC curtains** Hall, open edges	79 bulbs	A sagging wire just inside the PVC on all 13 bays; one bulb every 0.38 m. Run lengths: 2.0, 7.0, 5.3, 6.9, 3.3, 1.2, 3.1 m (about 28.9 m in all, plus 10% for sag and joins).	Wire at soffit minus 0.52 m, sagging about 0.22 m between pillars (about 1.4 to 2.3 m above the floor)	Outdoor festoon with 1 W LED bulbs, low-voltage (12 or 24 V) with a weatherproof driver **1 W each · 2200 K · about 70 lm** Beam: Omni	Dimmable (low-voltage driver) IP65 bulbs and joints; driver IP44 in a box Black cable, clear or amber bulbs	C	Lighting vendor Spares: 8	Hang the wire from the ring beam without drilling the pillars; allow for the PVC curtains rolling up.
BAR										
L12		**Bar front: string lights** Bar	19 bulbs	A row of small warm bulbs along the front edge of the 2.65 m counter, 15 cm apart.	About 1.0 m (under the counter overhang)	Low-voltage LED string **1 W each · 2200 K · about 60 lm** Beam: Omni	Dimmable IP44 Black cable	D	Lighting vendor Spares: 2	
L13		**Edison drop on the bar beam** Bar	6 nos	Six bare Edison bulbs on long cords from the reclaimed timber beam over the counter, at 0.45 m spacing.	Bulb at about 1.6 to 1.8 m above the floor; the beam is at 1.97 m and the soffit at 2.18 m	E27 ST64 LED filament, dimmable **4 W each · 2200 K · about 300 lm** Beam: Omni	Dimmable IP20 Brass lamp holder, black cord	D	Lighting vendor Spares: 1	Ceiling is only 1.10 m above the 1.08 m bar top: check head room for guests reaching across and the bartender.

Wattages and lumens are typical LED values for planning; the vendor states the real figures for the fittings offered. Reference pictures are illustrative renders. Group letters are explained in section 5. Spares are in addition to the quantities, about 10% for dining bulbs.

3 · Fixture schedule L01 to L35 (3 of 5)

CODE	REF.	FITTING AND AREA	QTY	LOCATION AND FIXING	MOUNTING HEIGHT	SOURCE, POWER, COLOUR, OUTPUT, BEAM	DIMMING, IP RATING, FINISH	GRP	SUPPLIED BY	NOTES
L14		**LED strip under the bar beam and glass rack** Bar	1 set	A strip under the beam (about 2.65 m) and two strips along the hanging glass rack (2 × 2.45 m).	Beam 1.93 m; glass rack 1.70 m	24 V LED strip in an aluminium channel with a diffuser, about 8 W per metre **8 W each · 2200 K · about 700 lm** Beam: Diffused	Dimmable IP20 Anodised aluminium	D	Lighting vendor Spares: 0	About 7.5 m of strip in all; confirm the driver location behind the back bar.
L15		**Back-lit onyx panel** Bar	1 no.	Backing for the onyx panel on the back bar, about 2.65 m wide × 1.4 m high.	Behind the panel, 0.96 to 2.38 m above the floor	24 V LED panel or tape behind the onyx, even diffusion **40 W each · Warm (2200 to 2700 K) · lumens: vendor to state** Beam: Diffused	Dimmable IP20 —	D	Lighting vendor Spares: 0	The onyx supplier supplies the panel; the lighting vendor supplies the LEDs and driver. Heat: onyx is thermally sensitive.
L16		**Coffee-shelf strip and bottle-cooler light** Bar	2 nos	Strips under the oak shelves at the coffee station; the bottle cooler has its own light. TO CONFIRM: the wall shelves have been removed in the 3D model.	Under the shelf, about 1.45 m	24 V LED strip in channel, about 0.8 m each **6 W each · 2700 K · about 500 lm** Beam: Diffused	Not dimmed IP20 Aluminium	—	Lighting vendor Spares: 0	Quote as an option until the shelves are confirmed.
POOL LOUNGE										
L17		**Billiard lamp** Pool lounge	1 no.	Long LED lamp 1.40 × 0.44 m over the 6 ft pool table, on two stems from the flat roof.	Lamp underside 1.70 m above the floor (0.91 m above the cloth)	Built-in LED, about 30 W **30 W each · 3000 K · about 2800 lm** Beam: Even, wide	On/off (dimmer optional) IP20 Dark green enamel with a brass trim	F	Lighting vendor Spares: 0	Aim for even light on the cloth with no hot spot; no glare for the players.
L18		**Pool lounge wall light** Pool lounge	2 nos	On the two side walls, warm globe lights.	About 2.05 m above the floor	E27 LED globe, dimmable **5 W each · 2200 K · about 400 lm** Beam: Omni	Dimmable IP44 Black bracket, opal globe	F	Lighting vendor Spares: 1	
APPROACH, GATE AND GARDEN										
L19		**Approach-path lamp post (existing)** Approach path	3 nos	The three black posts on the path (existing): re-lamp, check wiring, put on the timer and light sensor.	Lantern at about 2.4 m	E27 LED lamp, outdoor-rated **8 W each · 2700 K · about 800 lm** Beam: Omni	On/off (timer) IP65 Black, existing	E	Lighting vendor: re-lamp and rewire Spares: 1	Check earthing and the cable to each post.
L20		**Brass lantern over the path** Approach path	7 nos	Hung from the overhead line along the path.	At least 2.1 m clear above the path	E27 LED filament in an outdoor lantern **4 W each · 2200 K · about 300 lm** Beam: Omni	On/off (timer) IP65 Brass, aged	E	Lighting vendor Spares: 1	

Wattages and lumens are typical LED values for planning; the vendor states the real figures for the fittings offered. Reference pictures are illustrative renders. Group letters are explained in section 5. Spares are in addition to the quantities, about 10% for dining bulbs.

3 · Fixture schedule L01 to L35 (4 of 5)

CODE	REF.	FITTING AND AREA	QTY	LOCATION AND FIXING	MOUNTING HEIGHT	SOURCE, POWER, COLOUR, OUTPUT, BEAM	DIMMING, IP RATING, FINISH	GRP	SUPPLIED BY	NOTES
L21		**Wicker orb over the path** Approach path	**7 nos**	Hung from the overhead line, alternating with the lanterns.	At least 2.1 m clear above the path	E27 LED filament, outdoor orb or sleeve **4 W each · 2200 K · about 300 lm** Beam: Omni	On/off (timer) IP65 sleeve over the lamp holder Natural wicker with a waterproof liner	E	Lighting vendor; orb shells with the decor supplier Spares: 1	Wicker outdoors weathers: plan for replacement each season.
L22		**Fairy canopy over the path** Approach path	**1 set**	About 1,100 micro LEDs on fine wires above the 1.20 m path (about 5.5 m long).	Above 2.2 m	Outdoor micro-LED strands with a weatherproof driver **55 W each · 2200 K · lumens: vendor to state** Beam: Omni	On/off (timer) IP65 Clear or black wire	E	Lighting vendor Spares: 0	
L23		**Gate lantern (existing, two on the arched gate)** Road gate	**2 nos**	Two black lanterns on the arched gate (on site).	On the gate piers	LED retrofit lamp, outdoor **5 W each · Warm white · about 400 lm** Beam: Omni	On/off (timer) IP65 Black, existing	E	Lighting vendor: retrofit Spares: 0	
L24		**Lit gate sign and LED poster standee** Road gate	**2 nos**	The gate sign and the back-lit standee at the road (a dumpling poster with a tagline panel).	Sign about 2.5 m; standee floor-standing	Built-in LED, mains adaptor (standee about 40 W) **27 W each · Warm white · lumens: vendor to state** Beam: Diffused	On/off (timer) IP65 —	E	Standee and sign suppliers; lighting vendor supplies power and the timer Spares: 0	
L25		**Garden spike light (suggested, not in the model)** Garden	**4 nos**	Warm spikes on the areca palms in the 5 × 5 m garden, aimed up. Option.	Ground level	Outdoor LED spike, 5 W **5 W each · 2700 K · about 350 lm** Beam: 30° to 40°	On/off (timer) IP65 Black	E	Lighting vendor (option) Spares: 1	Price as an option.
KITCHEN, DISH WASH, STORE ROOM, WASHROOM (BACK OF HOUSE)										
L26		**Kitchen LED panel, 2 × 2 ft** Kitchen	**2 nos**	Over the cooking line and the benches.	Ceiling (about 2.6 to 3.0 m: the kitchen ceiling slopes)	LED panel 600 × 600, flicker-free **36 W each · 4000 K · about 3600 lm** Beam: Wide	Not dimmed IP44 (steam) White	–	Lighting vendor Spares: 0	Target 500 lux on the work surfaces; CRI at least 80 (90 if the chef asks).
L27		**Hood light** Kitchen	**3 nos**	Inside the exhaust hood, over the cooking units.	Under the hood, at 1.85 m	Hood-rated LED, sealed and vapour-proof **10 W each · 4000 K · about 900 lm** Beam: Wide	Not dimmed IP65 Stainless	–	Hood supplier (confirm) Spares: 0	Included in the hood price: the lighting vendor connects only.
L28		**Dish-wash batten, 4 ft** Dish wash	**2 nos**	Over the sinks and the racks along the 2.4 m run.	Ceiling (3.0 m)	4 ft LED batten, sealed **20 W each · 4000 K · about 2000 lm** Beam: Wide	Not dimmed IP65 White	–	Lighting vendor Spares: 1	Wet area: IP65 and corrosion-resistant fixings.


Wattages and lumens are typical LED values for planning; the vendor states the real figures for the fittings offered. Reference pictures are illustrative renders. Group letters are explained in section 5. Spares are in addition to the quantities, about 10% for dining bulbs.

3 · Fixture schedule L01 to L35 (5 of 5)

CODE	REF.	FITTING AND AREA	QTY	LOCATION AND FIXING	MOUNTING HEIGHT	SOURCE, POWER, COLOUR, OUTPUT, BEAM	DIMMING, IP RATING, FINISH	GRP	SUPPLIED BY	NOTES
L29		**Store-room batten, 4 ft** Store room	2 nos	Along the aisle between the racks; switch at the door.	Ceiling (3.0 m)	4 ft LED batten **20 W each · 4000 K · about 2000 lm** Beam: Wide	Not dimmed IP44 White	–	Lighting vendor Spares: 1	The aisle is 1.46 m wide and the racks are 1.80 m tall: keep the battens above the aisle, not above the racks.
L30		**Washroom pendant and mirror light** Washroom	2 nos	A jute pendant and a light over the mirror.	Pendant at about 2.0 m; mirror light above the mirror	E27 LED 6 W and an LED mirror light **7 W each · 3000 K · about 500 lm** Beam: Omni	Not dimmed IP44 (the mirror light IP44 minimum) Jute shade; brass trim	–	Lighting vendor Spares: 1	Washroom is lit to about 200 lux.
L31		**Kitchen store-passage light** Kitchen	1 no.	In the passage to the store room (about 1.95 × 1.48 m), under the open top of the timber false partition; switch at the passage opening.	Ceiling or high wall, about 2.4 m	LED batten or bulkhead, sealed, 2 ft **10 W each · 4000 K · about 1000 lm** Beam: Wide	Not dimmed IP44 White	–	Lighting vendor Spares: 1	The partition is timber and plywood and open above: fit to the ceiling, not to the partition.
L32		**Dish-wash cell light (over the two sinks)** Dish wash	1 no.	Over the two sinks in the 2.0 m cell at the east end, under the 500 L water tank.	Ceiling or wall, about 2.0 m, clear of the tank	LED bulkhead or 2 ft batten, sealed **10 W each · 4000 K · about 1000 lm** Beam: Wide	Not dimmed IP65 (wet) White or stainless	–	Lighting vendor Spares: 1	The tank hangs about 2.0 to 2.7 m above the floor: take its position from the site before you fix.
L33		**Door lights: kitchen door and dish-wash doorway (outside, pathway side)** Pathway behind the bar	2 nos	Over the kitchen door (0.80 m) and over the dish-wash doorway (1.17 m, no door) on the pathway side of the west wall; staff entrances at night.	About 2.3 m, above the doors	LED bulkhead, wall-mounted **8 W each · 3000 K · about 700 lm** Beam: Wide	On/off (switch inside or timer, group E) IP65 Black or white	E	Lighting vendor Spares: 1	Lights the 1.60 m pathway at the entrances; no glare into the bar.
L34		**Lobby ceiling light** Lobby	1 no.	Lobby (about 2.45 × 1.70 m) in front of the washroom.	Ceiling (about 3.0 m)	LED downlight or batten **9 W each · 3000 K · about 800 lm** Beam: Wide	Not dimmed IP44 White	–	Lighting vendor Spares: 0	
L35		**Emergency light and EXIT sign** Hall, bar, kitchen, washroom, exits	6 nos	Four emergency lights and two EXIT signs; final positions are decided with the Fire Department NOC.	Emergency lights at about 2.4 m; EXIT sign above the door	Self-contained battery units, 3-hour backup, maintained EXIT **3 W each · Cool white · about 200 lm** Beam: Wide	Always on / on mains failure IP44 minimum White	–	Lighting vendor (provisional) Spares: 0	Quote provisionally: the Fire NOC layout will fix numbers and positions.

Wattages and lumens are typical LED values for planning; the vendor states the real figures for the fittings offered. Reference pictures are illustrative renders. Group letters are explained in section 5. Spares are in addition to the quantities, about 10% for dining bulbs.

4 · Lighting plan, 1:100 (A3)

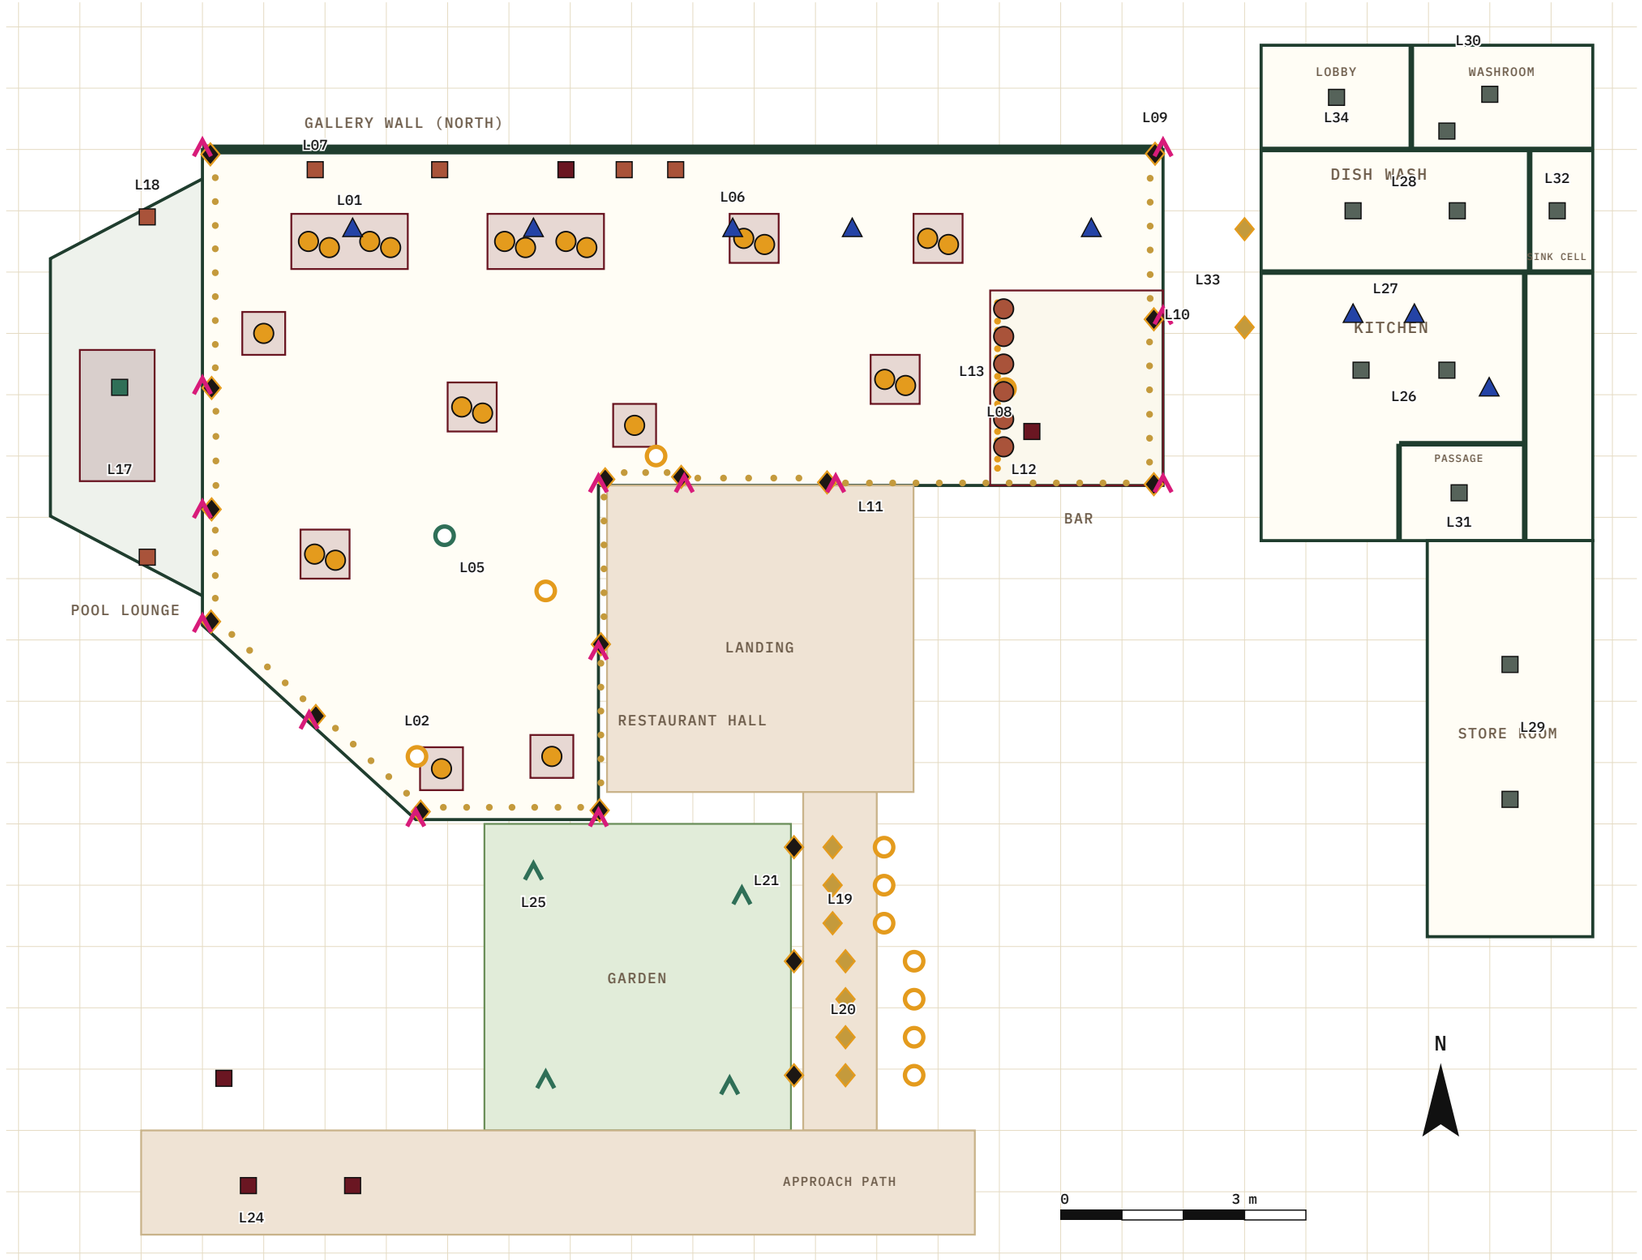

KEY

L01	Wicker orb over a table	Group A
L02	Wicker orb, ambient	A
L05	Centrepiece tree lights (and disc L05a)	E
L06	Gallery wall spot	B
L07	Bell-shaded wall lamp	B
L08	Picture light	B
L09	Bronze cage lantern on a pillar	C
L10	Ground uplight	E
L11	Festoon bulb (79)	C
L12	Bar string bulb (19)	D
L13	Edison drop on the bar beam	D
L17	Billiard lamp	F
L18	Pool lounge wall light	F
L19	Approach-path lamp post (existing)	E
L20	Brass lantern over the path	E
L21	Wicker orb over the path	E
L24	Gate lantern, sign, standee	E
L25	Garden spike light (option)	E
L26 L27	Kitchen panels and hood lights	switched
L28 L32	Dish-wash battens and sink-cell light	switched
L29 L30 L31 L34	Store, washroom, passage, lobby	switched
L33	Kitchen and dish-wash door lights	E

Notes.

1. North is up. Grid 1 m. Positions are read from the 3D model; the festoon follows the 13 bays of the open edges.
2. Not drawn: L03 (loose candles), L04 (fan kits), L14 to L16 (bar strips and panel, see the bar), L22 (path canopy), L27 (hood lights, drawn on the plan only as marks), L35 emergency lights (positions set with the Fire NOC).
3. Fittings over the path hang from an overhead line at least 2.1 m clear.
4. The kitchen block is shown at the same scale; the vendor to measure exact fixing points on site.

5 · Control groups, circuits and connected load

GRP	WHAT IS ON IT	CONTROL	LOAD	CURRENT*
A	Table orbs (L01, L02)	Dimmer	104 W	0.5 A
B	Wall lights (L06, L07, L08)	Dimmer	53 W	0.3 A
C	Open edges (L09, L11)	Dimmer	135 W	0.7 A
D	Bar (L12 to L16)	Dimmer	143 W	0.7 A
E	Outside, tree, uplights (L05, L05a, L10, L19 to L25)	Timer and light sensor; on/off	346 W	1.8 A
F	Pool lounge (L17, L18)	Dimmer (billiard lamp may be on/off)	40 W	0.2 A
—	Back of house and work lights (L26 to L35, fan lights)	Wall switches, not dimmed; emergency units on a separate circuit	295 W	1.5 A
	Total connected load		1116 W	5.8 A

* At 230 V with 20% allowed for drivers and power factor. Loads use the typical wattages in section 3 and will change with the fittings you offer; fan kits (4 × 10 W) are counted, loose candles are not.

PROPOSED CIRCUITS (ELECTRICIAN TO FINALISE)

- One circuit per group, each on its own 10 A MCB with 30 mA RCD protection: A, B, C, D, F dimmed; E on a timer; back of house on its own circuits.
- Dimmed groups: trailing-edge LED dimmer or an LED driver with 0 to 10 V or DALI control, one channel per group; flicker-free down to about 5%. State your method and the load limit of each channel.
- Group E: time clock and a photocell (on at dusk, off at a set time) with a manual override; the three approach lamp posts stay on until the last guest leaves.
- Master panel: a wall plate at the bar with the four presets Lunch, Sunset, Evening, Late and an "all on" for cleaning, so one person can set the whole place.
- Emergency: self-contained units on a permanent live feed, tested with a monthly button; positions from the Fire NOC.

DISTRIBUTION

- Lighting distribution board (position to be agreed on site; to confirm with the electrician), with spare ways.
- Low-voltage drivers (festoon, bar string, strips) mounted in ventilated, lockable, accessible boxes out of the rain; list their positions on your drawing.
- Isolators for the outdoor circuits (E) and the festoon.
- All cables: copper, flame-retardant, in conduit or trunking where exposed; outdoor runs in UV-resistant conduit, glanded, with drip loops.
- Earthing for all metal fittings; RCD and earth tests recorded.

6 · Fixing, wiring and installation notes

HALL CEILING AND BEAMS

- Confirm the substrate (RCC slab, plywood coffers or boards) on site before fixing orbs; allow for fixing points to a beam or a slab, not a felt panel.
- Orb cord lengths are cut on site to the heights in section 3; keep every orb the same height within a pair.
- Gallery spots (L06) go on the white beam, aimed at the wall: aim and lock them at commissioning with the art in place.
- Keep cabling in the ceiling void or in surface conduit painted to match; no visible wires.

PILLARS AND OPEN EDGES

- The 14 pillars are painted blue; chasing is not allowed without approval. Use surface conduit painted to match, or run cable in the balustrade plinth.
- Lanterns (L09) on a bracket 0.24 m out; same height on all pillars relative to the soffit.
- Festoon wire (L11): hang from the ring beam or the pillar brackets so the PVC curtains can roll up freely; use stainless wire strainers; keep bulbs clear of the PVC.
- Ground uplights (L10): junctions above the floor level, sealed; plan for rain and for the granite floor being washed.

BAR

- Beam over the counter is at 1.93 m and the soffit 2.18 m: only 1.10 m above the bar top. Keep fittings above 1.6 m and flush where you can.
- Drivers for the strips and the onyx panel go behind the back bar in a ventilated box; the onyx must not overheat.

POOL LOUNGE, GARDEN AND PATH

- Billiard lamp (L17): fix to the flat roof on two stems; check the roof construction; level over the table.
- Path lanterns and orbs hang from an overhead line: confirm the posts or fixings for the line and its tension.
- Existing lamp posts: test, re-lamp and rewire; replace damaged cable.

KITCHEN, DISH WASH, STORE ROOM, WASHROOM

- Sealed, IP44 to IP65 fittings; stainless or plastic fixings; no fittings directly over the fryer or hob except the hood lights.
- Kitchen ceiling is sloping: fix panels flush on a flat section.
- Store room: battens above the aisle, not above the racks (racks are 1.8 m tall, the aisle 1.46 m wide).

GENERAL

- Work at height: the highest fixings are about 2.8 m (hall edge) and 3.0 m (back of house); the roof and cowl work is not in this scope.
- Protect the finishes: tiles, brick, painted pillars, onyx, the mural wall and the granite floor. Make good any damage.
- Label every circuit and every driver box; supply a drawing of as-built positions and a circuit schedule.
- Fire stopping around any penetration of a fire-rated wall (kitchen block).
- All materials to comply with relevant BIS standards and the National Building Code; state the standards you follow.

7 · Inclusions, exclusions, testing, handover and terms

INCLUDED IN YOUR PRICE

- Supply of all fittings, drivers, dimmers, timer and photocell, control wall plate, junction and driver boxes, cables, conduit, glands, clips, fixings and brackets.
- Installation and wiring from the lighting distribution board to every fitting; labelling.
- Testing and commissioning: insulation and earth tests, dimmer presets, aiming of spots, lux readings at tables, bar and kitchen against section 2.
- Samples before ordering: L01, L09, L11, L13; a mock-up of one table, one pillar and one bay of festoon on site.
- Spares as listed (about 10% bulbs, plus spare drivers for the festoon and bar string).
- As-built drawing, circuit schedule, data sheets, warranty papers and a one-page user guide for the dimmer panel.
- A short training for two staff members.

WARRANTY AND SUPPORT

- LED fittings: at least 2 years; drivers and dimmers: at least 1 year; installation workmanship: 1 year.
- Response time for faults during the warranty: state it.

NOT INCLUDED (BY OTHERS)

- The distribution board and supply up to it, unless stated by you.
- Civil work: chasing, drilling of structure, plastering and painting after installation (state if you can include it).
- Fans, air conditioners, TV, speakers; the kitchen hood and its fire-suppression system (hood lights are connected only).
- Wicker orb shells, ivy and decor items; table candles, unless you agree to supply them.
- The standee and gate sign hardware (power and timer only).
- Fire alarm and Fire NOC design; emergency lights are priced provisionally.

COMMERCIAL

- State payment terms (we suggest a stage plan: advance, delivery, completion, retention after commissioning).
- State lead time per line and the programme; delivery to site; storage.
- State what is subject to change after the site visit and what price is fixed.
- Optional items (L16, L25, L35) priced separately.
- Alternatives welcome if equal in quality: give the data sheet and a photo.

8 · Price form (bill of quantities) (1 of 2)

CODE	ITEM	QTY	UNIT	SPARES	MAKE AND MODEL OFFERED	SUPPLY RATE (INR)	INSTALL RATE (INR)	LINE TOTAL (INR)	LEAD TIME	WARRANTY
DINING ROOM										
L01	Wicker orb pendant over a table	22	nos	3						
L02	Wicker orb, ambient	4	nos	1						
L03	Table candle (flameless)	15	nos	2						
L04	Ceiling-fan light kit	4	nos	0						
L05	Centrepiece tree: micro-LED strings	6	strings	1						
L05a	Centrepiece tree: ceiling disc	1	no.	0						
WALLS AND ART										
L06	Gallery wall spot	5	nos	1						
L07	Bell-shaded brass wall lamp	4	nos	1						
L08	Picture light	2	nos	0						
OPEN EDGES (BOUGAINVILLEA SIDE)										
L09	Bronze cage lantern on a pillar	14	nos	2						
L10	Ground uplight on the bougainvillea	14	nos	2						
L11	Festoon inside the PVC curtains	79	bulbs	8						
BAR										
L12	Bar front: string lights	19	bulbs	2						
L13	Edison drop on the bar beam	6	nos	1						
L14	LED strip under the bar beam and glass rack	1	set	0						
L15	Back-lit onyx panel	1	no.	0						
L16	Coffee-shelf strip and bottle-cooler light OPTION	2	nos	0						
POOL LOUNGE										
L17	Billiard lamp	1	no.	0						
L18	Pool lounge wall light	2	nos	1						

8 · Price form (bill of quantities) (2 of 2)

CODE	ITEM	QTY	UNIT	SPARES	MAKE AND MODEL OFFERED	SUPPLY RATE (INR)	INSTALL RATE (INR)	LINE TOTAL (INR)	LEAD TIME	WARRANTY
APPROACH, GATE AND GARDEN										
L19	**Approach-path lamp post (existing)**	3	nos	1						
L20	**Brass lantern over the path**	7	nos	1						
L21	**Wicker orb over the path**	7	nos	1						
L22	**Fairy canopy over the path**	1	set	0						
L23	**Gate lantern (existing, two on the arched gate)**	2	nos	0						
L24	**Lit gate sign and LED poster standee**	2	nos	0						
L25	**Garden spike light (suggested, not in the model)** OPTION	4	nos	1						
KITCHEN, DISH WASH, STORE ROOM, WASHROOM (BACK OF HOUSE)										
L26	**Kitchen LED panel, 2 × 2 ft**	2	nos	0						
L27	**Hood light**	3	nos	0						
L28	**Dish-wash batten, 4 ft**	2	nos	1						
L29	**Store-room batten, 4 ft**	2	nos	1						
L30	**Washroom pendant and mirror light**	2	nos	1						
L31	**Kitchen store-passage light**	1	no.	1						
L32	**Dish-wash cell light (over the two sinks)**	1	no.	1						
L33	**Door lights: kitchen door and dish-wash doorway (outside, pathway side)**	2	nos	1						
L34	**Lobby ceiling light**	1	no.	0						
L35	**Emergency light and EXIT sign** OPTION	6	nos	0						
							Controls: dimmers, timer, photocell, master panel			
							Cabling, conduit, distribution board work, driver boxes			
							Testing, commissioning, drawings, training			
							Sub-total			
							GST			
							Total			

Vendor name and address:	Contact, phone, email:	GST number:	Signature and date:
		Validity (days):	

9 · Site information, open points and questions for the vendor

WHAT WE KNOW AND WHAT IS STILL OPEN

QUESTION YOU WILL ASK	ANSWER
Supply voltage and phase	230 V, 50 Hz, single phase expected (not confirmed).
Distribution board location	TO CONFIRM on the site visit.
Who does the civil work (chasing, painting)	TO CONFIRM; the pillar and tile finishes must not be chased.
Working hours and access	TO CONFIRM; the hall, garden and kitchen block are accessible; the road gate is on the west.
Power available during the work	TO CONFIRM.
Scaffolding or lift	Highest fixing about 2.8 to 3.0 m; the hall ceiling is 2.18 to 2.80 m.
Ceiling construction and cable void	TO CONFIRM on site (the hall has white beams and coffers).
Existing lights and wiring	Three black lamp posts on the path, two lanterns on the gate: test and re-lamp. Nothing else is reused.
Fire NOC requirements	Not yet checked; emergency lights and exit signs are priced provisionally.
Opening date and handover	TO CONFIRM.
Dimmer panel position	At the bar, by the POS desk (suggested).
Samples and mock-up	Before any order: L01, L09, L11, L13.

PLEASE ANSWER IN YOUR QUOTATION

1. Which dimming method do you propose (trailing edge, 0 to 10 V, DALI)? How many channels, and what is the load limit per channel?
2. Will the festoon and the bar string run at low voltage? Where will the drivers go and how are they ventilated?
3. What is the IP rating and finish of the pillar lantern (L09), the uplight (L10) and the festoon (L11) you offer, and can you confirm a marine-grade finish?
4. What CRI and what colour consistency (bin) do you guarantee for the 2200 K bulbs? Can all bulbs come from one batch?
5. What are the lumens and the beam of the gallery spot and the billiard lamp, and how do you meet the lux targets in section 2?
6. How will the PVC curtains and the festoon share the ring beam without damaging either?
7. What is your lead time for each type, and which lines are imported?
8. What warranty and what response time do you offer, and who supplies spares?
9. Which items do you propose to change, and why?
10. What is not included in your price that we may have assumed?

Assumptions (not verified). Wattages and lumens are typical; the hall soffit rise from 2.18 m to 2.80 m is an estimate; the pool lounge depth and the kitchen block heights are from the model; the garden lights, coffee-shelf strips (L16) and emergency lights are options or provisional; the festoon run is read from the 13 bays in the 3D model; no electrical survey has been done.